

PIC Wire & Cable

A Division of the Angelus Corporation

(262)-246-0500

PO Box 330 Sussex, WI 53089

Fax (262)-246-0450

Termination Instructions

T-110783

Approved

TVH

Date 01/20/14

Rev. 0

Distribution : USER

Uncontrolled Document

Termination Instructions for PIC 110783 HD-BNC Bulkhead Jack connector

for PIC V76261, V73263, V75268 Coax Cable

Recommended Hand Tools :	X-acto Knife, Sharp Razor, Wire Cutters
Required Cable Tools :	M22520 / 5- 01 Hex Crimp Tool M22520/ 5-41, cav. B (.178" hex) Soldering equipment, OR Daniels # Y1833P Die Set (.042" square crimp)
Recommended Mounting Tool :	Amphenol RF # 227-1490 Spanner Wrench

Dimensions in Inches (Not To Scale)

- 1 Install ATUM 8/2 Dual Wall Shrink Tube x 1.5" onto the cable. Install the crimp ferrule onto the cable. Make Cut A @ .240" from cable end, through the jacket, wire braids, and foil (Fig. 1). Do not cut into dielectric. Remove jacket, wire braids, and foil.
- 2 Make Cut B @ .590" from the cable end, through the jacket only (Fig. 1). Do Not nick or cut into the wire braids. Leave the jacket on.
- 3 Make Cut C @ .160" from the cable end, through the dielectric (Fig 1). Do Not nick or cut into the center conductor. Remove the dielectric, verify center conductor integrity.
- 4 Verify proper fit of the center contact onto the stranded center conductor, with all strands intact. Solder or crimp the center contact onto cable center conductor (Fig. 2). If crimping, use .042" square crimp cavity (Daniels # Y1833P Die Set w/ M22520/5-01 crimp tool).
- 5 Remove jacket at Cut B. For **V76261**, flare the wire braids away from the cable, leaving foil intact (Fig. 3). For **V75268**, flare all braids out. For both, clean exposed dielectric and contact with clean, dry compressed air as needed. For **V73263**, unwrap the Spiral Shield layer all the way down to the bottom (of Cut B) without twisting it. The spiral strip can be positioned straight out along the inside of the flared braids. Dielectric must be exposed for the full length of the strip length (to Cut B).
- 6 Inspect and clean the dielectric as needed, prior to installing the connector body onto the cable. Inspect and clean Connector Body entry as needed.
- 7 Install the connector body over the dielectric and under the flared shields, until the the center contact is fully seated.
- 8 Smooth all braids down over the rear of the connector body, covering the knurl. Trim off any excess braids past the knurled rear body, trim even with the shoulder (Fig. 4).
- 9 Pull the crimp ferrule up over the braids. Secure the body while positioning the ferrule, to avoid shifting the center conductor. Trim any stray braids at the shoulder prior to seating the ferrule against the connector body.
- 10 Verify that the connector is fully seated onto the cable. Crimp the ferrule with the M22520 / 5 -01 hex crimp tool, using the M22520/ 5-41, cav. B hex crimp die set, cavity B (.178" hex).
- 11 Shrink the ATUM 8/2 dual wall shrink tube, starting at the bulkhead flange, covering the rear of the connector body and onto the cable (Fig. 5).
- 12 Use Amphenol RF # 227-1490 Spanner Wrench for mounting the connector in the bulkhead or panel.

Figure 1

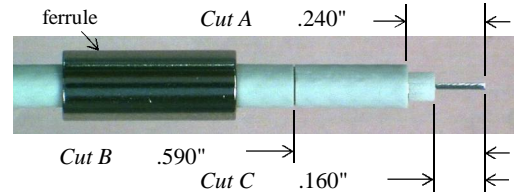


Figure 2

solder or crimp center contact



Figure 3

remove jacket, flare braids



Figure 4

lay braids flat



trim braids even w/ shoulder

Figure 5

shrink ATUM 8/2



Note: Connector Length added to cable = .425" nominal