


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110522</b>
	Approved <i>MCT</i>	Date 2/2/2009
	Distribution : USER	Rev. 1 (06/25/13) Uncontrolled Document

**SMA Straight Plug with Safety Wire Holes**  
for S29113

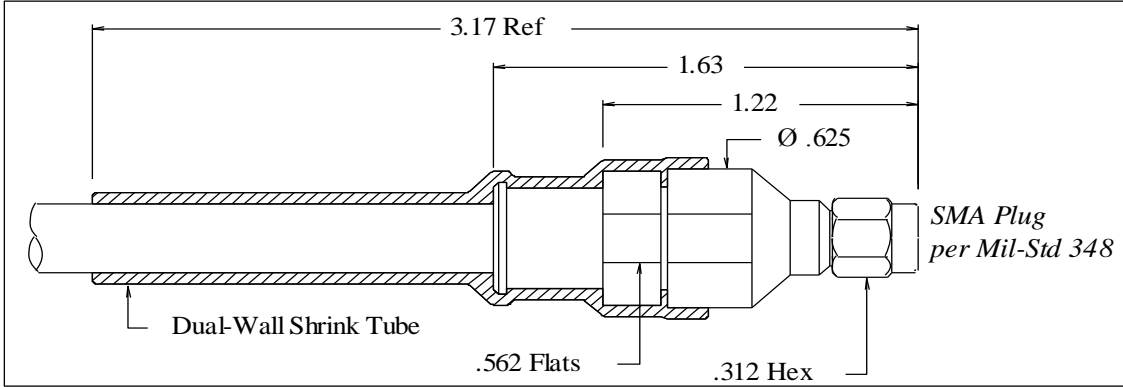

*Note: With safety wire holes*

**PERFORMANCE**

Nominal Impedance     50 Ohms  
Frequency Range         DC - 18 GHz

**CONNECTOR WEIGHT (Each)**

tbd

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

Solder-on Termination

**CONSTRUCTION**

***Materials:***

Body	Stainless Steel
Coupling Nut	Stainless Steel
Center Contact	Beryllium Copper
Insulator	PTFE
Gasket	Silicon Rubber

***Finish :***

Center Contact	Gold
Body and Coupling Nut	Passivated

<i>Applicable Standards</i>	MIL-STD 348 MIL-PRF-39012
-----------------------------	------------------------------

***Notes :***

*1) Please refer to T-110522 Termination Instruction sheet for strip dimensions & instructions.*