

A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 W220N1051 Springdale Road, Waukesha, WI 53186

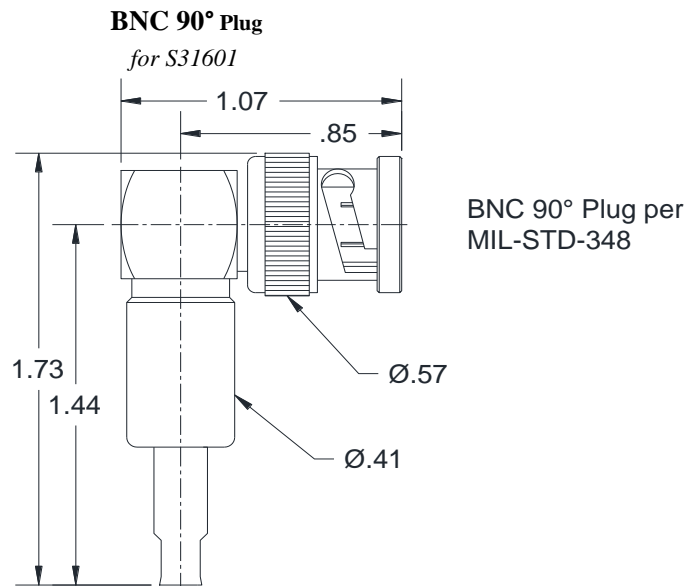
Approved : *JDA*

Date: 4/27/2021

Rev.: 0

Distribution : USER

Uncontrolled if Printed

**PERFORMANCE**

Nominal Impedance :	50 Ohms
Frequency Range :	0 - 4 GHz
Voltage Rating :	1500 V (rms)
Insulation Resistance :	5000 Megohms min.
Insertion Loss :	$0.17 \sqrt{F(\text{GHz})}$

CONNECTOR WEIGHT (Each)

0.846 ounces (23.98 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Center Contact**

M22520/5-01 Tool
 M22520/5-09 Hex Crimp Die
 Cavity B (.068" Hex)

Crimp Ferrule

M22520/5-01 Tool
 M22520/5-09 Hex Crimp Die
 Cavity A (.178" Hex)

CONSTRUCTION**Materials:**

Body	Brass
Cable Contact	Phosphor Bronze, Brass
Dielectric	Delrin

Finish :

Body	Nickel
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD-348B
 MIL-PRF-39012

Notes :

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-111130 Termination Instruction sheet for strip dimensions & instructions.