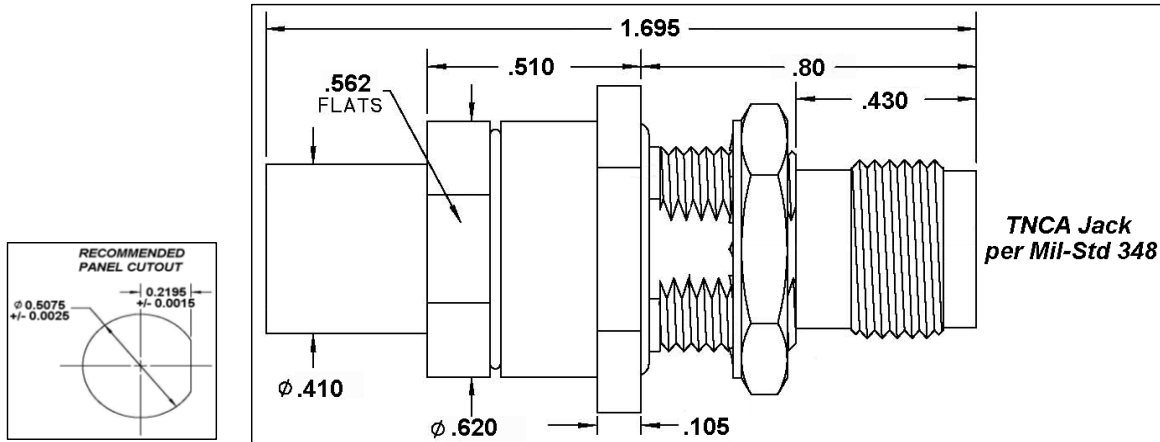


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved 
 Distribution : USER

Date : 02/08/19
 Rev : 0
 Uncontrolled if Printed

TNCA Bulkhead Jack
 for H77300F Cables

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	DC - 18 GHz
Temperature Rating	- 65° to + 165° C
Voltage Rating	500 V (rms)

CONNECTOR WEIGHT (Each)

1.14 ounces (32.43 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Solder-on Termination

CONSTRUCTION**Materials:**

Body	Stainless Steel
Clamp Nut	Stainless Steel
Center Contact	Beryllium Copper
Solder Ferrule	Brass
Dielectric	PTFE
O-Ring	Silicon Rubber
Lock Nut	Stainless Steel

Finish :

Body, Clamp Nut	Passivated
Solder Ferrule	Gold
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD-348, MIL-C-39012

Notes :

1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.

2) Please refer to T-120221 Termination Instruction sheet for strip dimensions & instructions.