

A Division of the Angelus Corporation

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

N220 W1051 Springdale Rd, Waukesha, WI 53186

Approved :

PFT

Date : 04/20/22

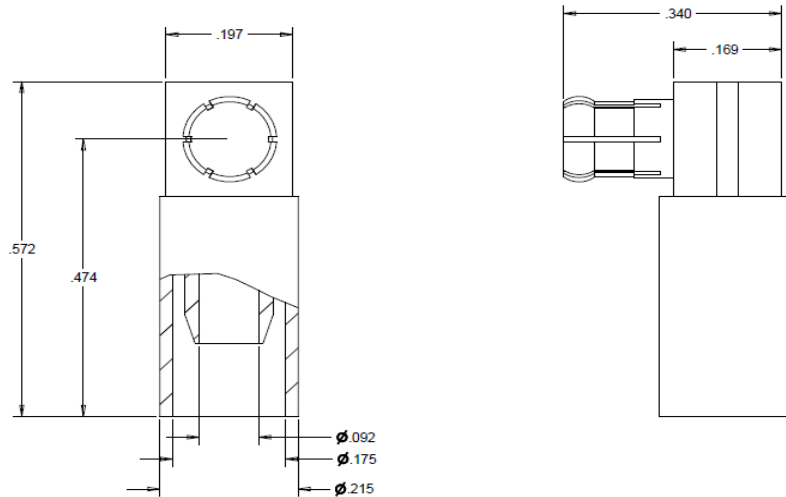
Rev : 0

Distribution : USER

Uncontrolled if Printed

75 Ohm MCX Right Angle Plug

For V73263, V75268, and V76261

**PERFORMANCE**

Nominal Impedance	75 ± 2 Ohms
Frequency Range	0 -12 GHz
Voltage Rating	335 V (rms)
Insulation Resistance	1000 Megohms
DW Voltage	500 V (rms)
VSWR	1.22:1 Max @ 6GHz 1.43:1 Max @ 12GHz
Insertion Loss (max)	0.14 dB max @ 12 GHz
Insertion Loss	0.04 √F(GHz)

CONNECTOR WEIGHT (Each)

0.10 ounces (2.9 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Center Contact**

Solder only

Crimp FerruleM22520 / 5-01 Tool
M22520 / 5-41 Die Set
(.178" B Hex)**CONSTRUCTION****Materials:**

Body	Brass per ASTM B16
Outer Contact	Beryllium Copper per ASTM B196
Cable Contact	Brass per ASTM B16
Ferrule	Tellurium Copper H02, Half-hard
Dielectric	Teflon Per ASTM D1710, Type 1, Grade 1, Class A

Finish :

Body, Ferrule	Gold Plate per ASTM B488
Center Contact	Gold Plate per ASTM B488

APPLICABLE STANDARDS

CECC 22 220

Notes :1) Please refer to T-190752 Termination Instruction
sheet for strip dimensions & instructions.