


EXPORT CONTROL STATEMENT:
 PUBLIC DISCLOSURE OF ANY INFORMATION TO FOREIGN PERSON, WHETHER IN THE UNITED STATES OR ABROAD, MARKED AS INDICATED ABOVE MAY BE PROHIBITED BY THE TRADE SECRETS ACT (18 U.S.C. SEC 1905), THE ECONOMIC ESPIONAGE ACT OF 1996 (18 U.S.C. 1831 ET SEQ.), AND INTERNATIONAL TRAFFIC IN ARMS REGULATIONS (ITAR). THIS DOCUMENT IS NOT TO BE MADE AVAILABLE WITHOUT PRIOR EXPRESS WRITTEN PERMISSION OF PIC WIRE & CABLE.

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE	12/11/23	M.KREMEL

4 PIC P/N 11012-4952-W-XV-YYYY-ZU

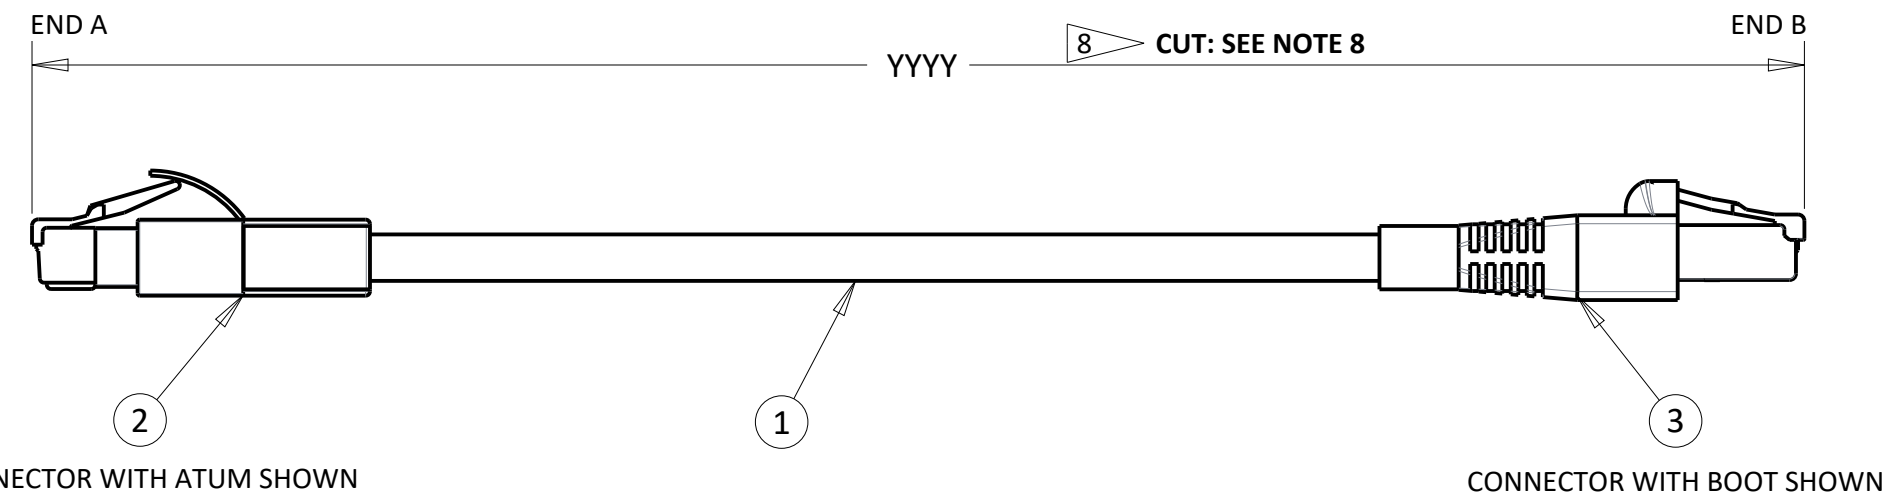

6 LABELS

END A	PIC WIRE & CABLE XXXXXX	11012-4952-W-XV-YYYY-ZU END A
CENTER	PIC WIRE & CABLE XXXXXX	11012-4952-W-XV-YYYY-ZU
END B	PIC WIRE & CABLE XXXXXX	11012-4952-W-XV-YYYY-ZU END B

NOTES

- ALL ASSEMBLY WORK TO BE PERFORMED PER ANG-MFG-SOP-00133 UNLESS OTHERWISE NOTED.
- SOLDERING TO BE PERFORMED PER IPC-J-STD-001, AS APPLICABLE.
- WORKMANSHIP TO BE PERFORMED PER IPC-A-620, CLASS 2.
- PIC SHIPSET NUMBER 11012-4952 INCLUDES ALL -W-XV-YYYY-ZU CABLES ON THIS DWG. TO ORDER INDIVIDUAL CABLE(S), SPECIFY ASSEMBLY DASH NUMBER(S) FOR EACH CABLE. (EG: 11012-4952-7-23-0120-13)
 SEE TABLE 1 AND 2 ON SHEET 2 FOR SPECIFIC NUMBERING SCHEME.
 W = ETHERNET CABLE
 X = CONNECTOR, END A
 V = CONNECTOR, END B
 YYYY = ASSEMBLY LENGTH IN INCHES (EG: 0120 = 120")
 Z = TERMINATION STANDARD, END A
 U = TERMINATION STANDARD, END B
- LABELS ARE PER SAE-AMS-DTL-23053/5-1XX (CLASS 1). COVER LABELS WITH CLEAR HEAT SHRINK PER SAE-AMS-DTL-23053/5-2XX-C (CLASS 2 - CLEAR). LENGTH AND SIZE OF LABELS & CLEAR SHRINK AS REQUIRED. XXXXXX ON LABEL = PIC WIRE & CABLE SERIAL NUMBER, AS APPLICABLE.
- UNLESS OTHERWISE SPECIFIED:
 FOR ASSEMBLIES 12 INCHES OR SHORTER, APPLY ONE LABEL LOCATED AT END A.
 FOR ASSEMBLIES WITH A LENGTH OF 12 TO 48 INCHES, APPLY ONE LABEL TO EACH END.
 FOR ASSEMBLIES LONGER THAN 48 INCHES, APPLY ONE LABEL TO EACH END AND ONE AT THE CENTER.
 FOR ASSEMBLIES WITH AN UNTERMINATED END, APPLY ONE LABEL TO TERMINATED END ONLY (REGARDLESS OF LENGTH).
- CONNECTOR P/N'S MARKED WITH * APPLY FOR TERMINATION STD 568A ONLY. CONNECTOR P/N'S MARKED WITH ** APPLY FOR TERMINATION STD 568B ONLY.
- CABLE CUT LENGTH = YYYY + 0.75".
- INCLUDE APPROPRIATE TEST DOCUMENTATION WITH EACH SHIPMENT.
 TEST REQUIREMENTS:
 ETHERNET TIA PROTOCOL TEST PER CABLE CATEGORY.
 FOR UNTERMINATED ASSEMBLIES, TEST FOR SHORTS AND CONTINUITY ONLY.

5	RNF-100-XXX-CL	TE SHRINK TUBE, CLEAR	A/R
4	TTMS-MP-XX.X-9	TE LABEL SHRINK TUBE, WHITE	A/R
3	SEE COLUMN V	CONNECTOR, END B	A/R
2	SEE COLUMN X	CONNECTOR, END A	A/R
1	SEE COLUMN W	CABLE	YYYY+0.75
ITEM NO	PART NO	DESCRIPTION	QTY

PARTS LIST

UNLESS OTHERWISE SPECIFIED, DRAWING UNITS ARE IN INCHES		W220 N1051 Springdale Rd. Waukesha, WI 53186 Phone: 800.742.3191 www.PICwire.com																																			
<table border="1"> <thead> <tr> <th>GENERAL TOLERANCES</th> <th>ASSEMBLY LENGTH TOLERANCES</th> </tr> </thead> <tbody> <tr> <td>XX ±1.0</td> <td>UP TO 18 +1/-0</td> </tr> <tr> <td>X.XX ±0.50</td> <td>19 TO 48 +2/-0</td> </tr> <tr> <td>X.XXX ±0.250</td> <td>OVER 48 +3/-0</td> </tr> <tr> <td>ANGLE ±5.0°</td> <td></td> </tr> </tbody> </table>	GENERAL TOLERANCES	ASSEMBLY LENGTH TOLERANCES	XX ±1.0	UP TO 18 +1/-0	X.XX ±0.50	19 TO 48 +2/-0	X.XXX ±0.250	OVER 48 +3/-0	ANGLE ±5.0°		<table border="1"> <thead> <tr> <th colspan="2">SIGNATURES ON FILE</th> <th colspan="2">TITLE</th> </tr> </thead> <tbody> <tr> <td>ISSUED</td> <td>DATE</td> <td colspan="2" rowspan="3">PIC WIRE & CABLE GENERIC ETHERNET ASSEMBLIES</td> </tr> <tr> <td>R.ESTERHUIZEN</td> <td>12/11/23</td> </tr> <tr> <td>CHECKED</td> <td>DATE</td> </tr> <tr> <td>F.BISHARA</td> <td>12/11/23</td> <td colspan="2"> PROPRIETARY NOTICE: THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN ARE PROPRIETARY DATA OF PIC WIRE & CABLE. NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED WITHIN SHALL BE USED, REPRODUCED, OR DISCLOSED WITHOUT WRITTEN AUTHORIZATION OF PIC WIRE & CABLE. </td> </tr> <tr> <td>APPROVED</td> <td>DATE</td> <td>DWG NO</td> <td>REV</td> </tr> <tr> <td>M.KREMEL</td> <td>12/11/23</td> <td>11012-4952</td> <td>0</td> </tr> </tbody> </table>			SIGNATURES ON FILE		TITLE		ISSUED	DATE	PIC WIRE & CABLE GENERIC ETHERNET ASSEMBLIES		R.ESTERHUIZEN	12/11/23	CHECKED	DATE	F.BISHARA	12/11/23	PROPRIETARY NOTICE: THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN ARE PROPRIETARY DATA OF PIC WIRE & CABLE. NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED WITHIN SHALL BE USED, REPRODUCED, OR DISCLOSED WITHOUT WRITTEN AUTHORIZATION OF PIC WIRE & CABLE.		APPROVED	DATE	DWG NO	REV	M.KREMEL	12/11/23	11012-4952	0
GENERAL TOLERANCES	ASSEMBLY LENGTH TOLERANCES																																				
XX ±1.0	UP TO 18 +1/-0																																				
X.XX ±0.50	19 TO 48 +2/-0																																				
X.XXX ±0.250	OVER 48 +3/-0																																				
ANGLE ±5.0°																																					
SIGNATURES ON FILE		TITLE																																			
ISSUED	DATE	PIC WIRE & CABLE GENERIC ETHERNET ASSEMBLIES																																			
R.ESTERHUIZEN	12/11/23																																				
CHECKED	DATE																																				
F.BISHARA	12/11/23	PROPRIETARY NOTICE: THIS DOCUMENT AND THE INFORMATION CONTAINED WITHIN ARE PROPRIETARY DATA OF PIC WIRE & CABLE. NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED WITHIN SHALL BE USED, REPRODUCED, OR DISCLOSED WITHOUT WRITTEN AUTHORIZATION OF PIC WIRE & CABLE.																																			
APPROVED	DATE	DWG NO	REV																																		
M.KREMEL	12/11/23	11012-4952	0																																		
UNLESS OTHERWISE SPECIFIED, DRAWING IS IN THIRD ANGLE PROJECTION (US STANDARD)	<table border="1"> <thead> <tr> <th>INTERPRET DRAWING:</th> <th>CAGE</th> <th>SHEET</th> </tr> </thead> <tbody> <tr> <td>PER ASME Y14.100-2004</td> <td>OBCW9</td> <td>1 OF 2</td> </tr> </tbody> </table>			INTERPRET DRAWING:	CAGE	SHEET	PER ASME Y14.100-2004	OBCW9	1 OF 2																												
INTERPRET DRAWING:	CAGE	SHEET																																			
PER ASME Y14.100-2004	OBCW9	1 OF 2																																			

TABLE 1						
W	CABLE	X	CONNECTOR (END A)	V	CONNECTOR (END B)	YYYY LENGTH (in)
0	E10424	1	N/A	1	N/A	0006 - 3216
		2	190061*	2	190061*	
		3	UNTERMINATED	3	UNTERMINATED	
1	E50824	1	110787	1	110787	0006 - 3216
		2	110339	2	110339	
		3	UNTERMINATED	3	UNTERMINATED	
2	E6A0824	1	111170	1	111170	0006 - 2952
		2	111172	2	111172	
		3	UNTERMINATED	3	UNTERMINATED	
3	E6A5824	1	111179	1	111179	0006 - 3552
		2	111181	2	111181	
		3	UNTERMINATED	3	UNTERMINATED	
4	E6A6824	1	111170	1	111170	0006 - 2952
		2	111172	2	111172	
		3	UNTERMINATED	3	UNTERMINATED	
5	E6A5826	1	111174	1	111174	0006 - 2760
		2	111176	2	111176	
		3	UNTERMINATED	3	UNTERMINATED	
6	E6A6826	1	110731	1	110731	0006 - 2568
		2	110725	2	110725	
		3	UNTERMINATED	3	UNTERMINATED	
7	E74824	1	111179	1	111179	0006 - 3552
		2	111181	2	111181	
		3	UNTERMINATED	3	UNTERMINATED	
8	E74826	1	111174	1	111174	0006 - 2760
		2	111176	2	111176	
		3	UNTERMINATED	3	UNTERMINATED	
9	E84824	1	111107**	1	111107**	0006 - 1080
		2	N/A	2	N/A	
		3	UNTERMINATED	3	UNTERMINATED	

TABLE 2		
TERMINATION STANDARD	Z (END A)	U (END B)
568A	1	1
568B	2	2
UNTERMINATED	3	3