

*A Division of the Angelus Corporation*

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

N220 W1051 Springdale Rd, Waukesha, WI 53186

Approved:

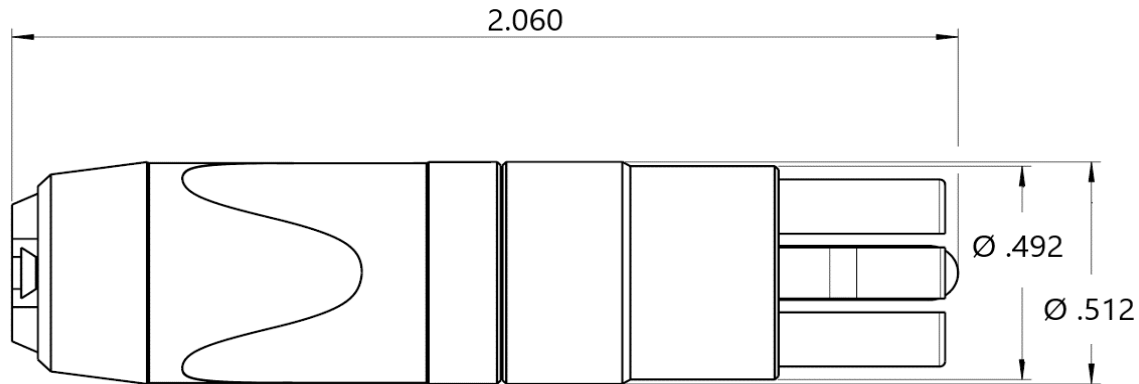
PFT

Date 10/09/03

Rev. 4 (05/23/22)

Distribution : USER

Uncontrolled Document

**RCA Plug**  
for V75268, V76261, V73263**PERFORMANCE**

Frequency Range	0 - 200 MHz
Voltage Rating	250 VAC
Insulation Resistance	1000 Megohms
Temperature Rating	- 30° to + 80° C

**CONNECTOR WEIGHT (Each)**

2.10 ounces (59.54 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION***Center Contact & Shield: Soldered**Cable Retention : Threaded End Cap w/ Collett***CONSTRUCTION****Materials:**

Shell	Brass
Center Contact	Brass
Outer Contact	Brass
Chuck	Polyacetal POM
Dielectric	PBTP

**Finish :**

Shell	Black Finish
Center Contact	Gold Plated
Outer Contact	Gold Plated

**Notes :**

- 1) Two 1.5" pieces of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-110218 Termination Instruction sheet for strip dimensions & instructions.