
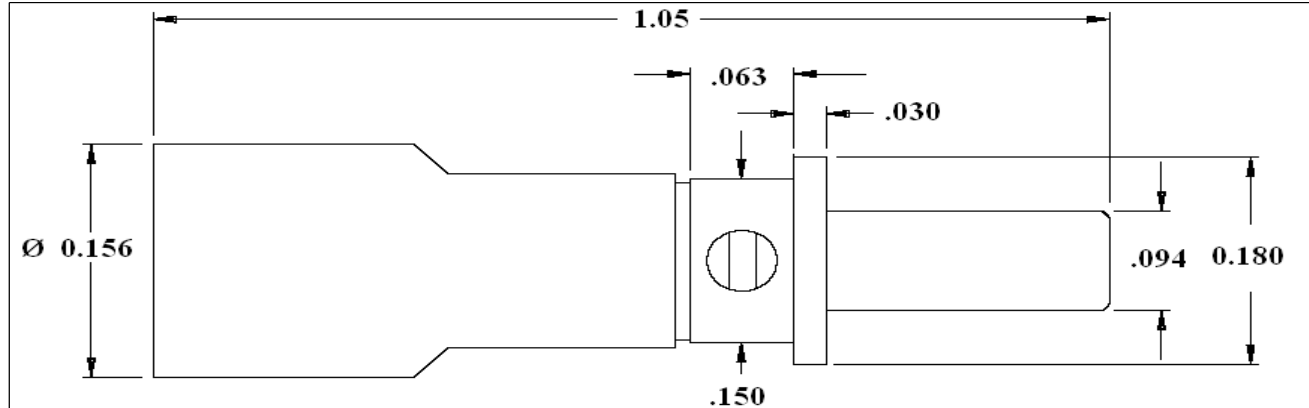


PIC Wire & Cable	Connector Specification	P/N 110510
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 08/11/10
	Distribution : USER	Rev. 3 (08/17/15)
		Uncontrolled if Printed

M39029 Size 12 Coax Pin Contact
for V73263, V75268 and V76261



PERFORMANCE

Nominal Impedance : Non-Constant
 Temperature Range : -55 °C to 125 °C

CONNECTOR WEIGHT

.020 ounces (0.560 grams)

MATES WITH

PIC P/N 110500 - Size 12 Socket Contact

RoHS COMPLIANT

Does not comply to RoHS standards

CONSTRUCTION

Materials :

Contact Body : Beryllium Copper
 ASTM B196

Inner Contact : Beryllium Copper
 ASTM B196

Dielectric : ETFE
 ASTM D3159

Finish :

Contact Body : Gold over Nickel
 Outer Contact : Gold over Nickel

Applicable Standards :

M39029/28
 MIL-C-38999 Series I, III and IV

Notes :

1) Please refer to TV-110510 Termination Instruction sheet for strip dimensions & instructions.