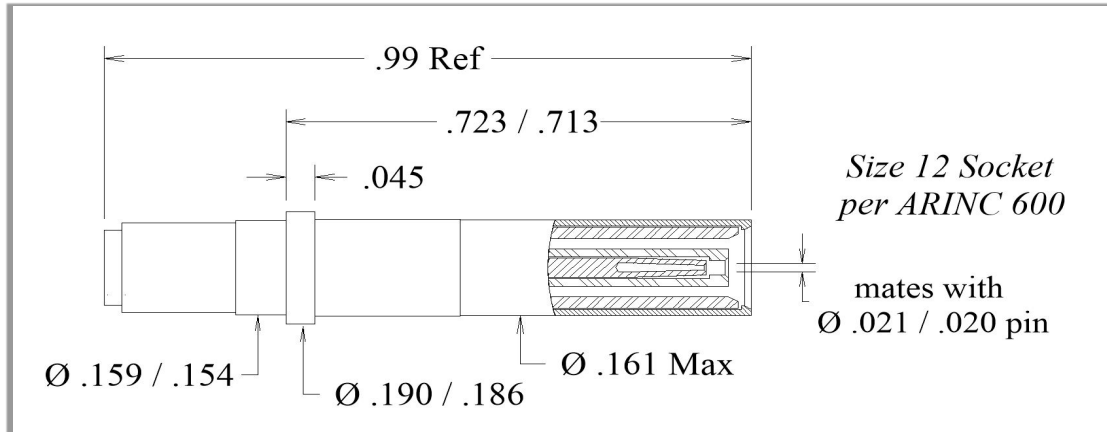


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : *PFT*
 Distribution : USER

Date : 03/04/20
 Rev : 0
 Uncontrolled if Printed

ARINC 600 Size 12 Coaxial Socket Contact
for S31601

**PERFORMANCE**

Nominal Impedance : 50 Ohms
 Frequency Range : 0 - 1 GHz
 Voltage Rating : 325 V(rms)
 Insulation Resistance : 5000 Megohms min.

CONNECTOR WEIGHT (Each)

0.11 ounces (3.18 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Center Contact**

Solder Only

Crimp Ferrule

M22520 / 5-01 Tool
 M22520 / 5-35 Die Set, Cavity B
 (.128" hex)

CONSTRUCTION**Materials:**

Body	Copper Alloy
Outer Hood	Stainless Steel
Center Contact	Copper Alloy
Ferrule	Copper Alloy
Dielectric	PTFE

Finish :

Body, Ferrule	Gold
Center Contact	Gold
Outer Hood	Passivated Stainless

APPLICABLE STANDARDS

ARINC 600

Notes :

- 1) Please refer to T-110981 Termination Instruction sheet for strip dimensions & instructions.
- 2) Removal Tool P/N M81969/14-04