

*A Division of the Angelus Corporation*

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

Approved :

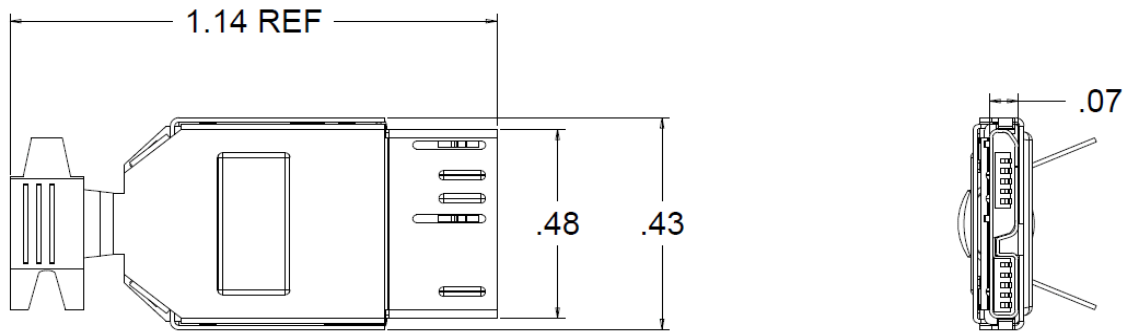
PFT

Date : 12/10/2020

Rev : 0

Distribution : USER

Uncontrolled if Printed

**USB 3 Micro B Plug Connector***(For PIC Cable P/N's USB3-2624 & USB3-2624-9)***PERFORMANCE**

Voltage Rating 30 VAC (R.M.S.)

Temperature Rating - 25° to + 80° C

**CONNECTOR WEIGHT (Each)**

0.077 ounces (2.17 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**APPLICABLE STANDARDS**

USB 3.0 / 3.1

**CONSTRUCTION****Materials:**

Body	Steel
Contacts	Phosphor Bronze
Insulator	Thermoplastic, UL 94V-0

**Finish :**

Contact	Gold over Nickel
Body	Nickel

**INSTALLATION**

Recommended Crimp Tool for crimping strain relief/cable shield is Tyco P/N 58433-1. Similar circular crimp tools acceptable.

**Notes :**

1) Please refer to T-111167 Termination Instructions for stripping dimensions & instructions.