
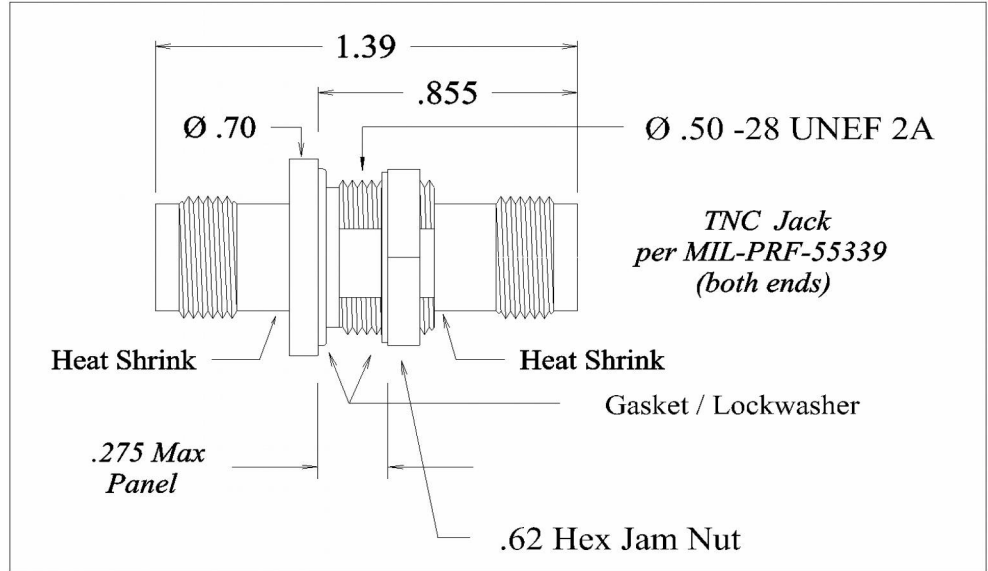


<b>PIC Wire &amp; Cable</b>	<b>Connector Specification</b>	<b>P/N 190005-(*)</b>
A Division of the Angelus Corporation Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 01/19/17
	Distribution : USER	Rev. 0
		Uncontrolled if Printed

### TNC Jack to Jack Bulkhead Adapter, 50 Ohm, Hermetically Sealed

\* See Table Below for P/N

190005-R = Adptr w/Red Shrink
190005-BL = Adptr w/Blue Shrink
190005-BK = Adptr w/Black Shrink
190005-Y = Adptr w/Yellow Shrink



#### PERFORMANCE

Impedance :	50 Ohms nom
Frequency Rating :	0 - 12 GHz
Voltage Rating :	500 V (rms)
Insertion Loss :	0.14 F (GHz)
Insulation Resistance :	5000 MegOhms min
Temperature Rating :	-40° C to +150° C

#### CONNECTOR WEIGHT

.78 ounces (22.11 grams)

#### RoHS COMPLIANT

Complies to RoHS Standards

#### APPLICABLE STANDARDS

MIL-PRF-55339, MIL-STD-348

#### CONSTRUCTION

##### **Materials:**

Connector Body :	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact :	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Dielectric :	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

##### **Finish :**

Body :	Nickel
Center Contact :	Gold

#### INSTALLATION

Recommended Jam Nut Torque : 35 to 40 in. lbs.

