


*A Division of the Angelus Corporation*  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 W220 N1051 Springdale Rd Waukesha, WI 53186

Approved : 

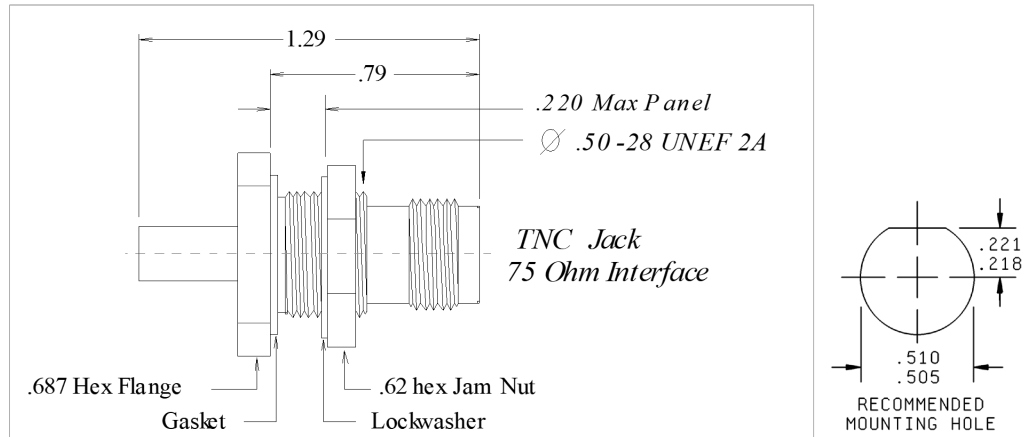
Date : 08/06/03

Rev : 4 (04/05/21)

Distribution : USER

Uncontrolled if Printed

**TNC Bulkhead Jack**  
*for V75268 / V76261 / V73263*

**PERFORMANCE**

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

0.72 ounces (20 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

**Crimp Tooling:**

*Center Contact* M22520 / 2 - 01 Tool,  
 PIC 110202 Positioner,  
 (Daniels K1301), Dial Setting # 5

*Crimp Ferrule* M22520 / 5 - 01 Tool,  
 M22520 / 5-41, B Hex Crimp Die  
 (.178 hex). PIC P/N 110333

**CONSTRUCTION****Materials:**

Body, Jam Nut	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft,
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Lock Washer	Phosphor Bronze
Gasket	Silicone Rubber

**Finish :**

Body, Ferrule	Nickel
Center Contact	Gold

**APPLICABLE STANDARDS**

MIL-STD 348  
 MIL-PRF-39012

**Notes :**

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.