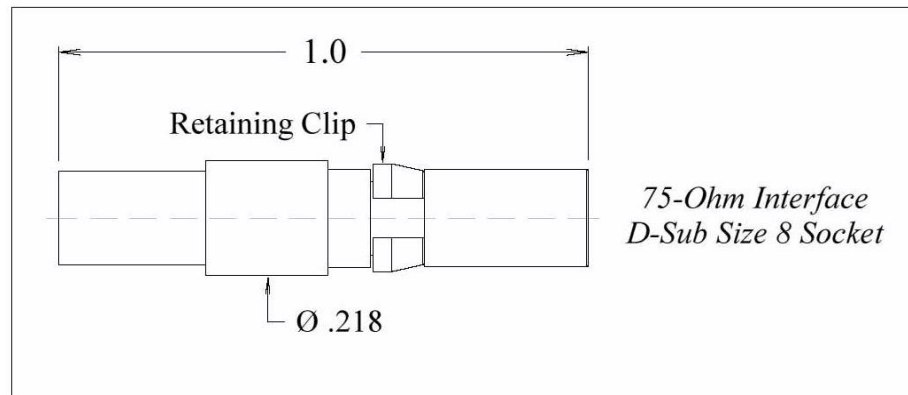


PIC Wire & Cable**Connector Specification****P/N 190764**

A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 N220 W1051 Springdale Road, Waukesha, WI 53186

Approved : *FMB*
 Distribution : USER

Date : 12/12/12
 Rev : 5 (06/21/22)
 Uncontrolled if Printed

D-Sub Size 8 Socket (Receptacle) Contact - 75 Ohm Interface*for V73263 / V75268 / V76261***For use only with 75 Ohm Interface mating contact P/N 190763 ONLY.****PERFORMANCE**

Impedance :	75 Ohms
Frequency Range :	0 - 3 GHz
Insertion Loss :	0.1 dB max @ 3 GHz
Voltage Rating :	1000 V (rms)
Insulation Resistance :	2000 Megohms min.
DW Voltage :	1500 V(rms)

CONNECTOR WEIGHT (Each)

0.101 oz. (2.88 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION (Tooling)**Center Contact**

M22520 / 2 - 01 Tool, Dial Setting @ # 4
 Recommended Positioner :
 PIC P/N 110754, (Daniels # K1887)

Crimp Ferrule

M22520 / 5 - 01 Tool
 Die Set:
 PIC P/N 110376, (Daniels # Y187)
 Cavity B (.156" hex)

CONSTRUCTION**Materials:**

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	PTFE Fluorocarbon, ASTM-D1457
Clip Ring	Beryllium Copper, ASTM-B194

Finish :

Body, Contact, Ferrule	Gold, MIL-G-45204
Clip Ring	Nickel, QQ-N-290

APPLICABLE STANDARDS

IDS-76
 MIL-DTL-24308

Notes :

- 1) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.
- 2) Recommended Removal Tools :
 Palco P/N T0100-K, Positronics P/N 4311-0-0-0,
 or ITT P/N CET-C6B