



WM25815

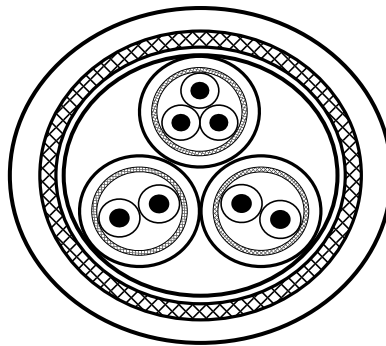

WM25807

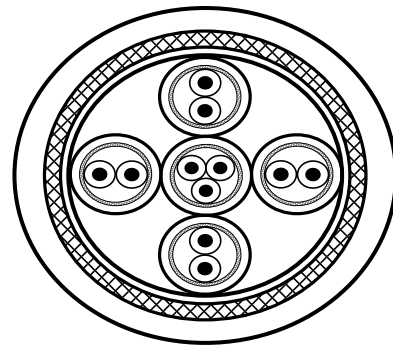

WM25811

These cables are approved by L-3 Communications Flight Systems for installing Models WX-1000+ Stormscope Weather Mapping Systems and Models CWS 691, TCAS 791 and Skywatch 497/899 Collision Warning / Collision Avoidance Systems.

All cables have multiple shields of tinned copper braid with 95% minimum coverage. They are Skydrol resistant, RoHS compliant and meet the FAA flammability requirements of FAR Part 23 and 25, Appendix F; comply with MIL-C-27500 as applicable.

SPECIFIC CABLE CONFIGURATIONS

PART #	Wire AWG Pairs	Wire AWG Triad	No. Of Conductors	Jacket (Fluoropolymer)	OD (in.)	Weight (lbs./100ft.)
WM 25815	24	22	15	Red	0.400	14.5
WM 25807	24	24	7	Clear	0.280	8.5
WM 25811	24	22	11	Blue	0.350	11.3

All values nominal, unless otherwise noted

**STORMSCOPE™
COMPOSITE CABLES**