


KMH 880/980 & KTA 870/970 TAS/TCAS RF CABLE WORKSHEET

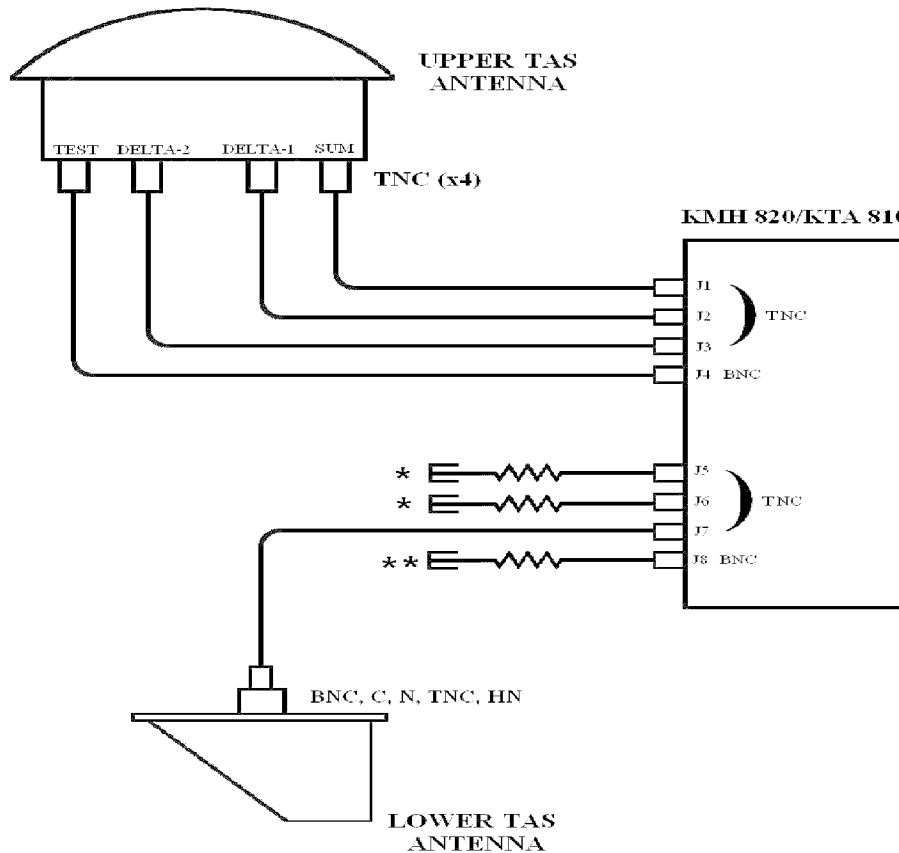

UPPER ANT. INFO:

UPPER ANT. CABLE LENGTH : _____

CONN. ANGLE @ UPR ANT. : _____

CONN. ANGLE @ LRU : _____

LOWER ANT. INFO:

LOWER ANT. CABLE LENGTH : _____

CONN. ANGLE & TYPE @ LWR ANT. : _____

CONN. ANGLE @ LRU : _____

* 50 OHM TNC LOAD P/N 190002 REQUIRED

** 50 OHM BNC LOAD P/N 190004 REQUIRED

LABELING: Standard Labeling is P/N, S/N and connection Info.

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH# : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____

Cable (Test) Requirements :

Insertion Loss: 1.0 to 3.0 dB @ 1.09 GHz for each antenna cable.

VSWR: 1.5:1 Max @ 1.09 GHz. for each ant. cable.

Phase-Matching: Set of 4 upper ant. cables Phase-Matched within 90° @ 1.09 GHz.