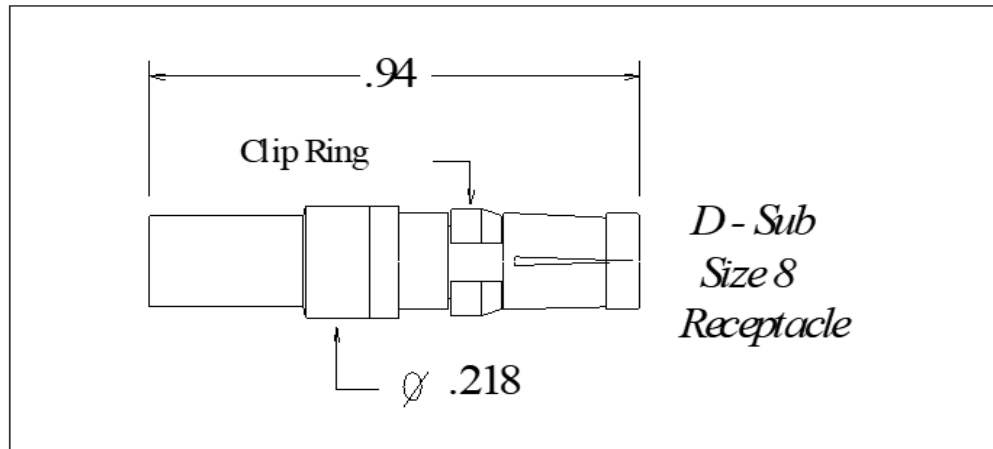


A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 W220 N1051 Springdale Road Waukesha, WI 53186

Approved : *FMB*  
 Distribution : USER

Date : 09/25/00  
 Rev : 11 (06/21/22)  
 Uncontrolled if Printed

**D-Sub Size 8 Socket (Receptacle) Contact***(for V75268 / V76261 / V73263)**Note : Use with PIC PN 110235 Contact Only***PERFORMANCE**

Impedance : 75 Ohms  
 Frequency Range : 0 - 2 GHz  
 Insertion Loss : 0.5 dB max @ 2 GHz  
 Voltage Rating : 1000 V (rms)  
 Insulation Resistance : 5000 Megohms min.  
 DW Voltage : 1500 Megohms min.

**CONNECTOR WEIGHT (Each)**

0.09 ounces (2.55 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION****Center Contact**

M22520/2-01 Tool, Dial Setting #5  
 Positioner : PIC PN 110204 (Daniels K817-3)

**Crimp Ferrule**

M22520 / 5 - 01 Tool  
 Die Set M22520 / 5 - 37  
 Cavity B (.151" hex)  
 PIC P/N 110283, (Daniels # Y138)

**CONSTRUCTION****Materials:**

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	PTFE Fluorocarbon, ASTM-D1457
Clip Ring	Beryllium Copper, ASTM-B194

**Finish :**

Body, Contact, Ferrule	Gold, MIL-G-45204
Clip Ring	Nickel, QQ-N-290

**APPLICABLE STANDARDS**

IDS -16  
 MIL-DTL-24308

**Notes :**

1) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.

2) Recommended Removal Tools :

Palco P/N T0100-K, Positronics P/N 4311-0-0-0,  
 or ITT P/N CET-C6B