

**PIC Wire & Cable**

A Division of the Angelus Corporation

Ph 262-246-0500

Fax 262-246-0450

PO Box 330 Sussex, WI 53089

**Connector Specification****110326**

Approved

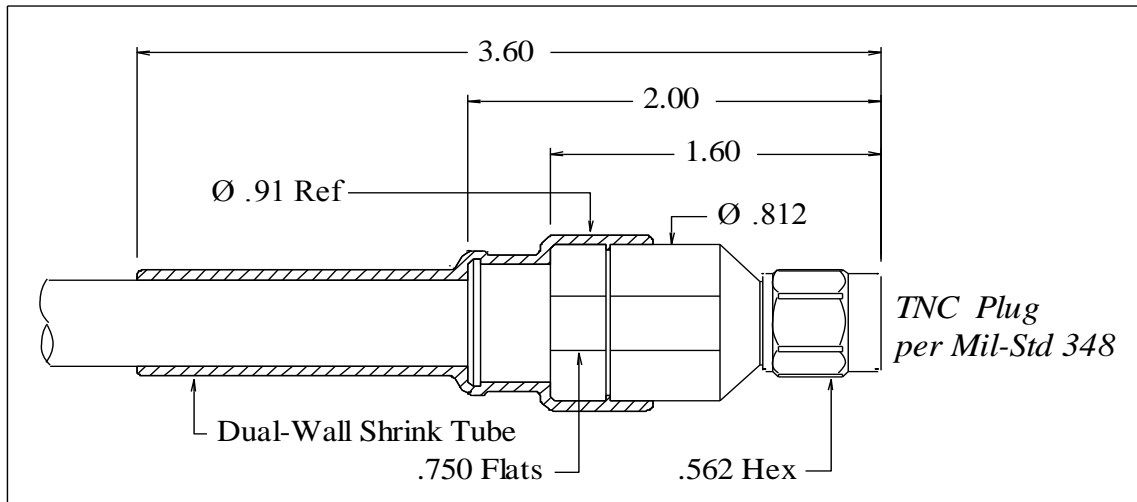
*MCT*

Date 02/24/05

Rev. 2 (06/25/13)

Distribution : USER

Uncontrolled Document

**TNC Straight Plug**  
for S29085

Features Not Shown: Seal in front

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	0 - 18 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

2.0 ounces (56.70 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION****Crimp Tooling:**

Solder-on Termination

**CONSTRUCTION****Materials:**

Body	Stainless Steel
Coupling Nut	Stainless Steel
Center Contact	Brass
Dielectric	PTFE Fluorocarbon

**Finish :**

Body	Passivated
Coupling Nut	Passivated
Center Contact	Gold

**Applicable Standards**MIL-STD 348  
MIL-PRF-39012**Notes :**

1) Please refer to T-110326 Termination Instruction sheet for strip dimensions &amp; instructions.