


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	110344
	Approved <i>MCT</i>	Date 02/10/10
	Distribution : USER	Rev. 1 (06/25/13) Uncontrolled Document

USB "B" Plug Connector
for USB2422

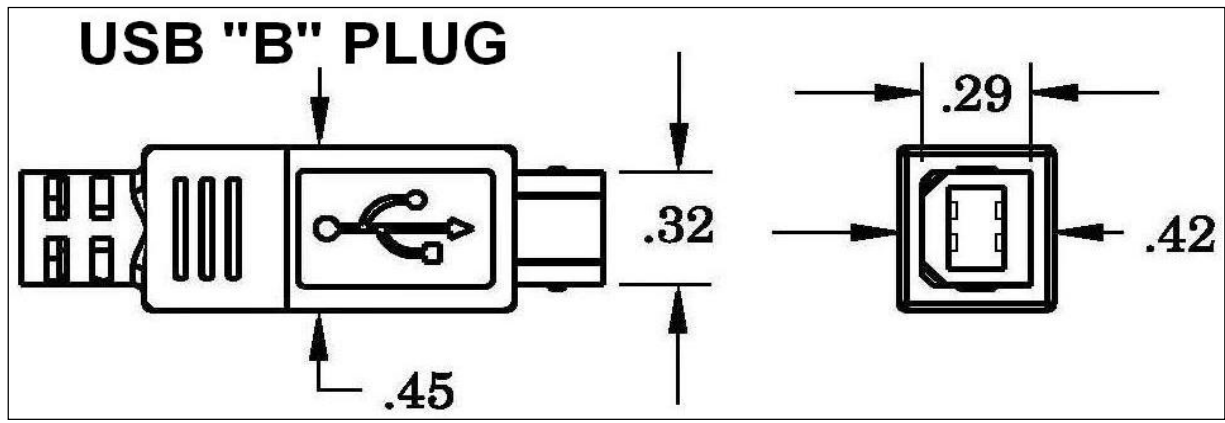

PERFORMANCE

Voltage Rating 30 VAC (R.M.S.)
 Temperature Rating - 55° to + 85° C

CONNECTOR WEIGHT

.256 ounces (7.26 grams)

RoHS COMPLIANT

Complies to RoHS standards

CONSTRUCTION

Materials:
 Body Steel
 Contact Copper Alloy
 Hood ABS Resin - UL 94V-0 Rated

Finish :
 Contact Gold
 Body Tin / Lead

Applicable Standards USB 2.0

- Notes :**
- 1) Two 1.5" pieces of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
 - 2) Please refer to T-110344 Termination Instruction sheet for strip dimensions & instructions.