


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110349</b>
	Approved <i>MES</i>	Date 02/04/10
	Distribution : USER	Rev. 3 (06/25/13) Uncontrolled Document

**TNC Straight Plug**  
for S29124, S28120

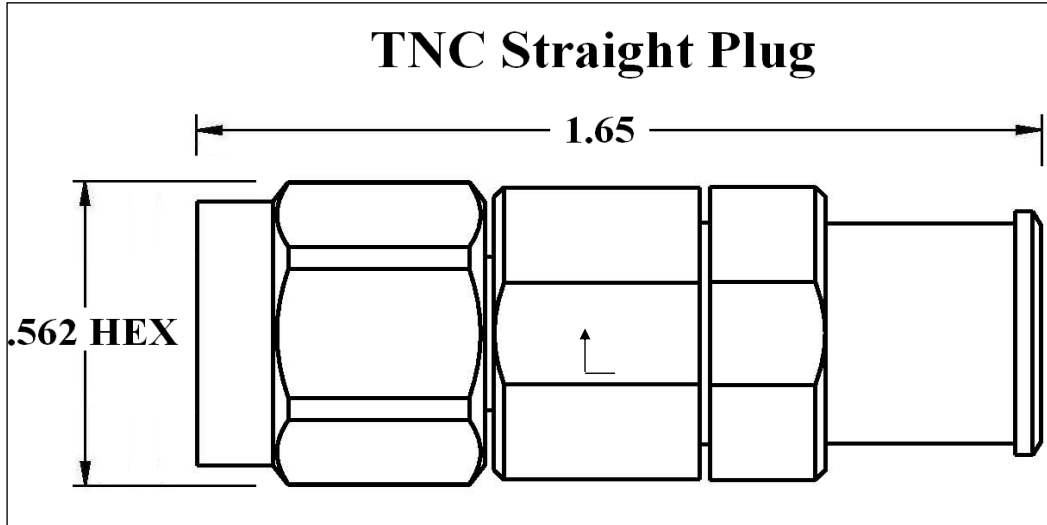

*Features Not Shown : Gasket in Front*

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	DC - 15 GHz
Temperature Rating	- 65° to + 200° C

**CONNECTOR WEIGHT (Each)**

1.08 ounces (30.62 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling***

Solder-on Termination

**CONSTRUCTION**

***Materials:***

Body	Stainless Steel
Coupling Nut	Stainless Steel
Center Contact	Beryllium Copper
Insulator	PTFE
Gasket	Silicon Rubber

***Finish :***

Center Contact	Gold
----------------	------

***Applicable Standards***

MIL-STD 348A  
MIL-C-39012

***Notes :***

*1) Please refer to T-110349 Termination Instruction sheet for strip dimensions & instructions.*