



TT-5000 AERO-I (TT-5006A Ant.) RF CABLE WORKSHEET

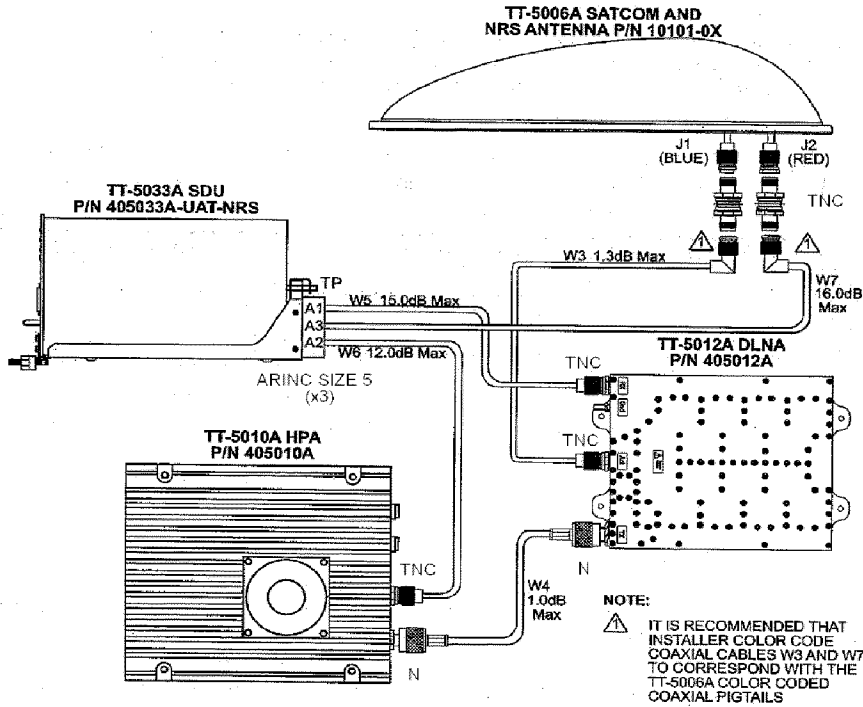

Cable (Test) Requirements :

- Test W3 from 1530 to 1559 MHz and 1626 to 1660.5 MHz.
- Test W4 & W6 cables from 1626 to 1660.5 MHz.
- Test W5 cable from 1530 to 1559 MHz.
- Test W7 cable at 1575.42 MHz.
- VSWR : 1.5:1 max for each cable @ their respective frequencies.

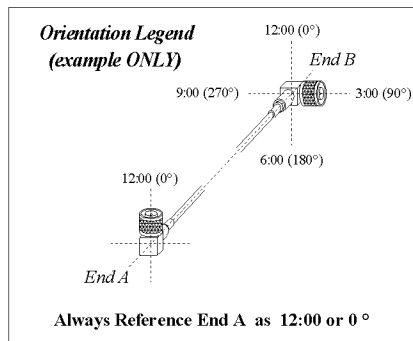

CABLE ASSEMBLY INFO:

W3 - LENGTH: _____
 CONN ANGLES: @ DLNA _____ @ ANT. _____

*CONNECTOR ORIENTATION: _____

W4 - LENGTH: _____
 CONN ANGLES: @ DLNA _____ @ HPA _____

*CONNECTOR ORIENTATION: _____

W5 - LENGTH: _____
 CONN ANGLE: @ DLNA _____

W6 - LENGTH: _____
 CONN ANGLE: @ HPA _____

W7 - LENGTH: _____
 CONN ANGLE: @ ANT. _____

LABELING: Standard labeling is P/N, S/N & connection Info.

***Connector Orientation**

(Assemblies ≤ 20 ft with (2) 90° Connectors)
 Configuration Depicted : End B is 3:00 or 90° from end A.

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____