

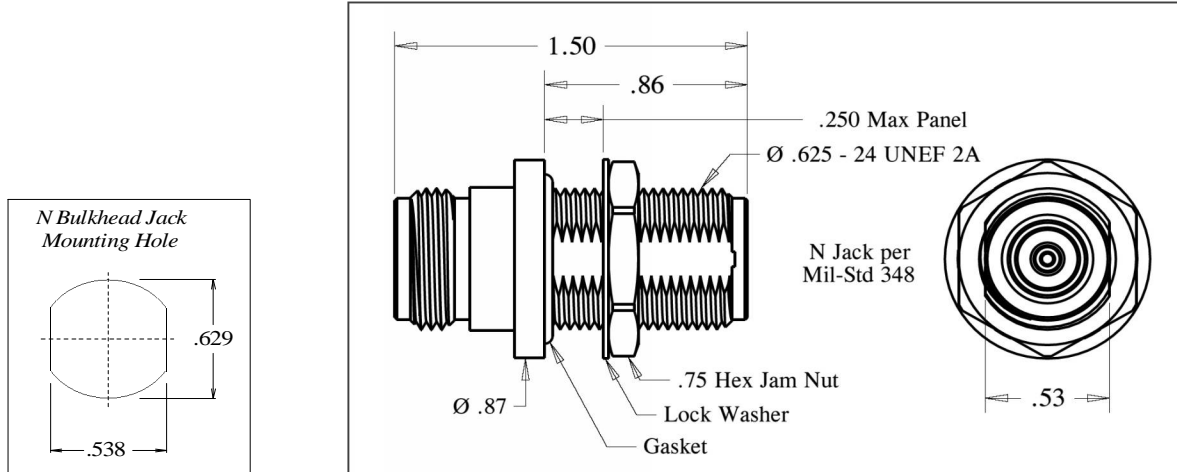
PIC Wire & Cable**Connector Specification****P/N 110694**

A Division of the Angelus Corporation
 PH 262-246-0500 Fax 262-246-2450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : 
 Distribution : USER

Date : 11/27/12
 Rev. 4 (01/22/16)
 Uncontrolled if Printed

**N Jack to Jack Bulkhead Adapter,
 18 GHz, Sealed**

**PERFORMANCE**

Impedance : 50 Ohms nom.
 Frequency Range : 0 - 18 GHz
 Voltage Rating : 1000 V (rms)
 Insulation Resistance : 5000 Megohms min.
 Insertion Loss : .05 $\overline{F(\text{GHz})}$
 Power Rating : 425 Watts @ 18 GHz
 Seal Rating : 1×10^{-7} atm cm³/s

CONNECTOR WEIGHT (Each)

1.67 ounces (47.40 grams)

RoHS COMPLIANT

Complies to RoHS Standards

CONSTRUCTION***Materials:***

Connector Body : Stainless Steel
 Jam Nut, Lock Washer : Stainless Steel
 Center Contact : Beryllium Copper
 Dielectric : TFE Fluorocarbon

Finish :

Body : Passivated
 Center Contact : Gold

APPLICABLE STANDARDS

MIL-STD-348, MIL-PRF-55339

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.