

A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : PFT

Date : 02/20/20


Rev. 0

Distribution : USER

Uncontrolled if Printed

TNC Jack to Jack Bulkhead Adapter, 50 Ohm, Hermetically Sealed

w/ .440" Flats

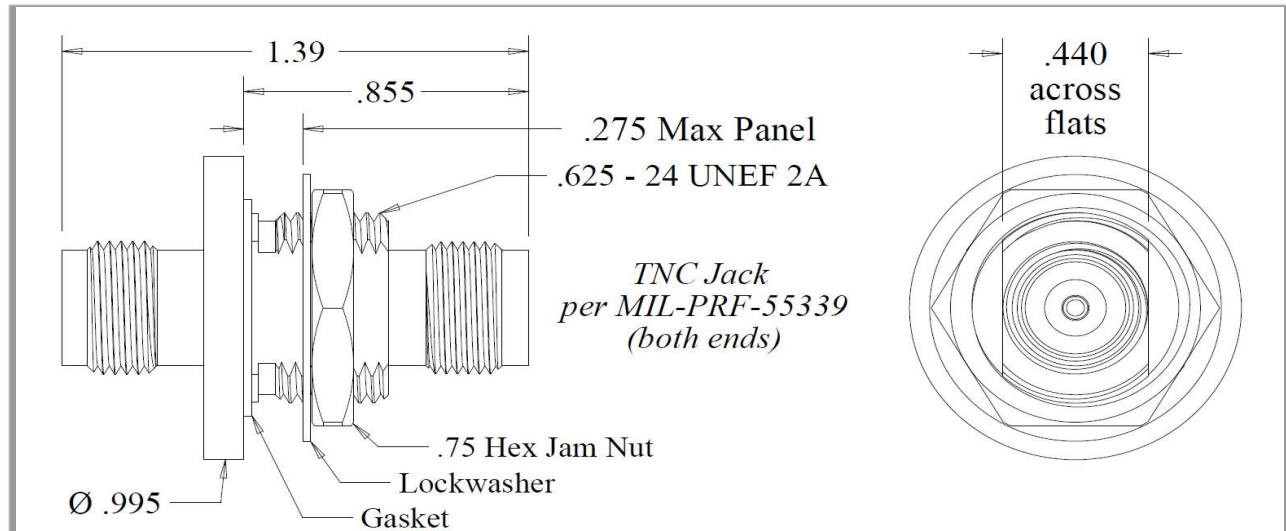

PERFORMANCE

Impedance : 50 Ohms nom
 Frequency Rating : 0 - 12 GHz
 Voltage Rating : 500 V (rms)
 Insertion Loss : 0.14 V F (GHz)
 Insulation Resistance : 5000 MegOhms min
 Temperature Rating : -55° C to +165° C

CONNECTOR WEIGHT (Each)

tbd

RoHS COMPLIANT

Complies to RoHS Standards

APPLICABLE STANDARDS

MIL-PRF-55339, MIL-STD-348

CONSTRUCTION

Materials:

Connector Body : Stainless Steel, Alloy UNS S30300
 Center Contact : Beryllium Copper, ASTM-B196, Alloy UNS C17300
 Dielectric : TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
 Jam Nut, Lockwasher : Stainless Steel, Alloy UNS S30300

Finish :

Body, Jam Nut, Lockwasher : Nickel
 Center Contact : Gold

INSTALLATION

Recommended Jam Nut Torque : 35 to 45 in. lbs.

