

A Division of the Angelus Corporation

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

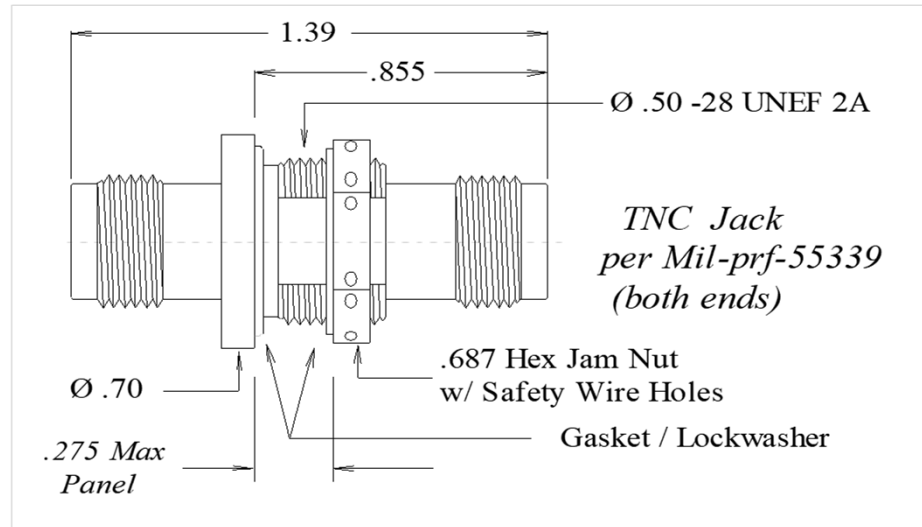
Approved : *MCJ*

Date : 06/06/07

Rev : 6 (04/18/19)

Distribution : USER

Uncontrolled if Printed

TNC Jack to Jack Bulkhead Adapter, 50 Ohm, Hermetically Sealed
w/safety wire holes**PERFORMANCE**

Impedance : 50 Ohms nom
 Frequency Rating : 0 - 12 GHz
 Voltage Rating : 500 V (rms)
 Insertion Loss : 0.14 √ F (GHz)
 Insulation Resistance : 5000 MegOhms min
 Temperature Rating : -65° C to +165° C

CONNECTOR WEIGHT (Each)

.82 ounces (23.25 grams)

RoHS COMPLIANT

Complies to RoHS Standards

APPLICABLE STANDARDS

MIL-PRF-55339, MIL-STD-348

CONSTRUCTION**Materials:**

Connector Body : Brass, ASTM-B16,
Alloy UNS 36000, H02
 Center Contact : Beryllium Copper, ASTM-B196,
Alloy UNS C17300
 Dielectric : TFE Fluorocarbon, ASTM-D1710,
Type 1, Grade 1

Finish :

Body : Nickel
 Center Contact : Gold

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Not to scale