
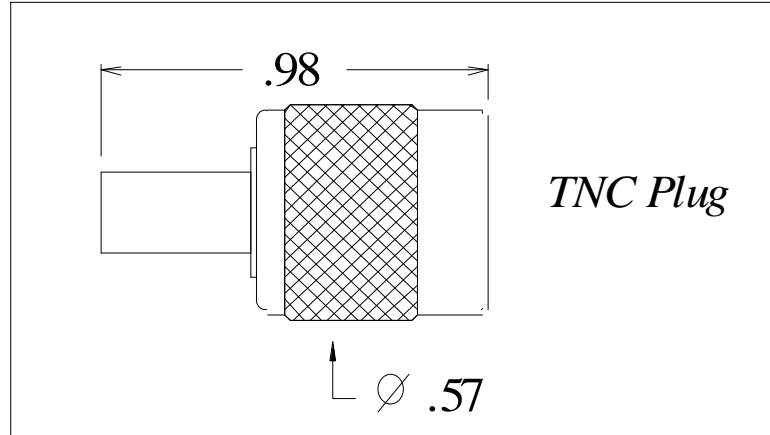


<b>PIC Wire &amp; Cable</b>	<b>Connector Specification</b>	<b>P/N 190708</b>
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 09/06/01
	Distribution : USER	Rev. 8 (01/27/14) Uncontrolled Document

**TNC Straight Plug**  
for V75268, V76261, V73263



*Features Not Shown : Gasket in Front*

**PERFORMANCE**

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (each)**

.46 ounces (16.04 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

<i>Center Contact</i>	M22520 / 2 - 01 Tool, Selector Dial @ # 6 Recommended Positioner : PIC # 110204 (Daniels # K817-3)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, M22520 / 5-41, B Hex Crimp Die (.178 hex). PIC P/N 110333

**CONSTRUCTION**

***Materials:***

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft,
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

***Finish :***

Body, Ferrule	Nickel
Center Contact	Gold

<i>Applicable Standards</i>	MIL-STD 348 MIL-PRF-39012
-----------------------------	------------------------------

***Notes :***

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.