

A Division of the Angelus Corporation

Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com

PO Box 330 Sussex, WI 53089

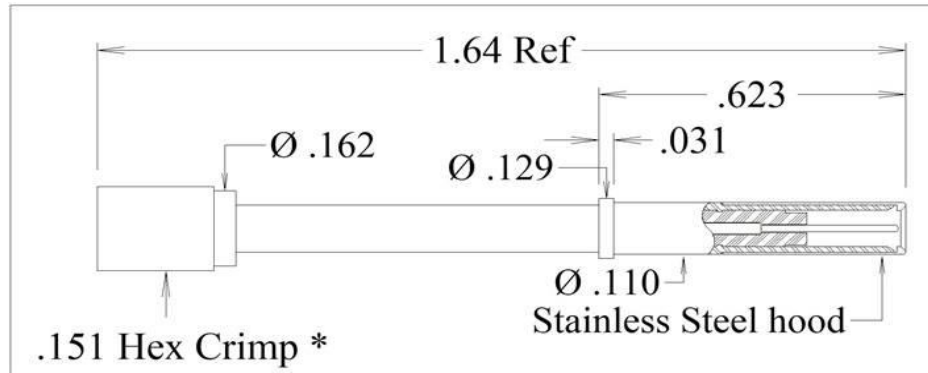
Approved :

Date : 02/20/19

Rev : 1 (03/29/19)

Distribution : USER

Uncontrolled if Printed

M39029 Coaxial Size 16 Socket Contact*for V73263, V75268, V76261 (L7626TX Inner)***PERFORMANCE**

Nominal Impedance	Non-Constant
Frequency Range	0 - 400 MHz
Voltage Rating	250 V(rms)
Insulation Resistance	5000 Megohms
DW Voltage:	500 V(rms)
VSWR (Max)	1.3:1
Insertion Loss (Max)	0.3 dB

CONNECTOR WEIGHT (Each)

0.24 ounces (6.80 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION***Crimp Tooling:***

<i>Center Contact</i>	M22520 / 2 - 01 Tool, Dial Setting # 5 Recommended Positioner : PIC # 110300 (Daniels # K1598)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, M22520/5 - 37 Hex Die Set, Cav. B *(0.151 Hex - Daniels # Y138)

CONSTRUCTION***Materials:***

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300 w/ Stainless Steel Hood
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

Finish :

Body, Ferrule	Gold
Center Contact	Gold
Stainless Steel Hood	Passivated

APPLICATIONSMIL-DTL-38999, Series I, III, IV
SAE-AS39029/77***Notes :***

- 1) A 3/4" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.
- 3) Removal Tool is P/N M81967/14-03