

*A Division of the Angelus Corporation*Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
PO Box 330 Sussex, WI 53089

Approved :

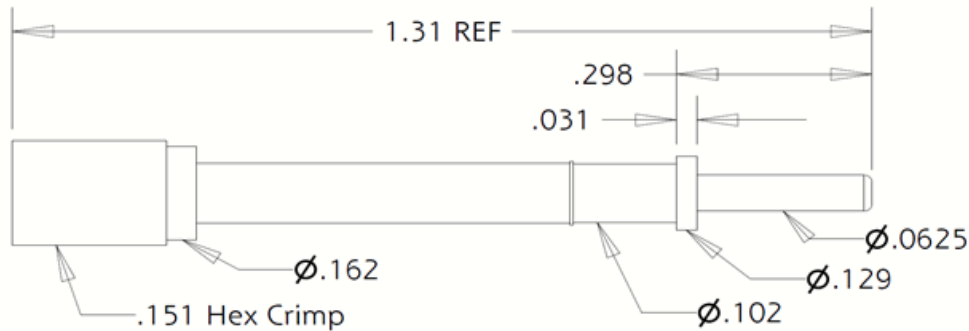


Date : 04/01/19

Rev : 0

Distribution : USER

Uncontrolled if Printed

M39029 Coaxial Size 16 Pin Contact*for V73263, V75268, V76261 (L7626TX Inner)***PERFORMANCE**

Nominal Impedance	Non-Constant
Frequency Range	0 - 400 MHz
Voltage Rating	250 V(rms)
Insulation Resistance	5000 Megohms
DW Voltage:	500 V(rms)
VSWR (Max)	1.3:1
Insertion Loss (Max)	0.3 dB

CONNECTOR WEIGHT (Each)

0.24 ounces (6.80 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION**Crimp Tooling:**

<i>Center Contact</i>	M22520 / 2 - 01 Tool, Dial Setting # 5 Recommended Positioner : PIC # 110323 (Daniels # K1599)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, M22520/5 - 37 Hex Die Set, Cav. B *(0.151 Hex - Daniels # Y138)

CONSTRUCTION**Materials:**

Body / Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

Finish :

Body, Ferrule	Gold
Center Contact	Gold

APPLICATIONSMIL-DTL-38999, Series I, III, IV
SAE-AS39029/76**Notes :**

- 1) A 3/4" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with contact for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.
- 3) Removal Tool is P/N M81967/14-03