
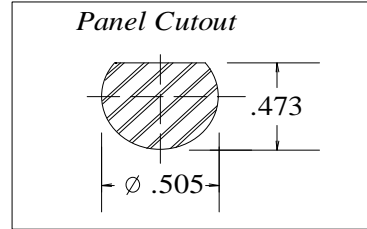


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	190928
	Approved <i>MCT</i>	Date 05/20/10
	Distribution : USER	Rev. 2 (06/11/13) Uncontrolled Document

BNC Bulkhead Jack
for V78209

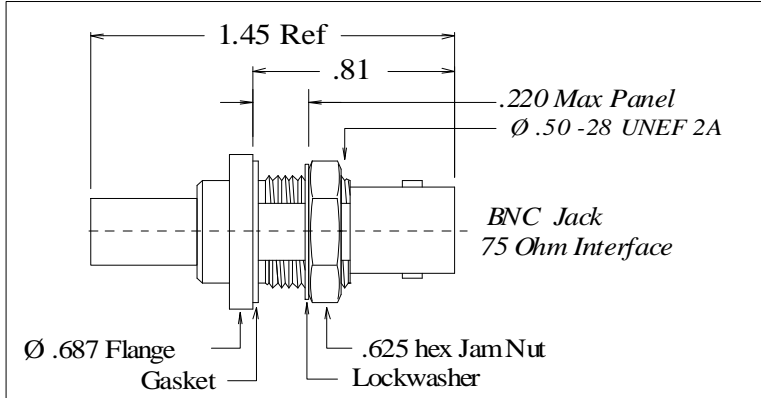

PERFORMANCE

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

CONNECTOR WEIGHT (Each)

0.66 ounces (18.65 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Crimp Tooling:

Center Contact M22520 / 1 - 01 Tool,
Selector Dial @ # 3
Recommended Positioner :
PIC # 110656 (Daniels # TH729),
Selector @ Green

Crimp Ferrule M22520 / 5 - 01 Tool,
Die Set M22520 / 5 - 59 ,
PIC P/N 110697
Cavity A (.255" hex)

CONSTRUCTION

Materials:

Body	Brass, ASTM-B16
Center Contact	Beryllium Copper, ASTM-B196
Ferrule	Copper, Alloy 122
Dielectric	TFE Fluorocarbon, ASTM-D4894
Lock Washer	Phosphor Bronze, QQ-B-750
Gasket	Silicone Rubber, ZZ-R-765

Finish :

Body, Ferrule	Nickel
Center Contact	Gold

<i>Applicable Standards</i>	MIL-STD 348 MIL-PRF-39012
-----------------------------	------------------------------

Notes :

1) Please refer to T-1909XX Termination Instruction sheet for strip dimensions & instructions.