



PIC Wire & Cable <i>A Division of the Angelus Corporation</i> Ph 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	190508
	Approved 	Date 04/10/97
	Distribution : USER	Rev. 4 (05/07/08)

TNC Straight Plug
for S67163, S68162



CABLE DIMENSIONS



A	Jacket (overall) O.D.	.225 / .230
B	Over-shields O.D.	.195 / .179
C	Dielectric O.D.	.160 / .149
D	Center conductor O.D.	.057

PERFORMANCE

Nominal Impedance	50 Ohms
Frequency Range	0 - 12 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

Force to Engage

Longitudinal	NA
Torque	2 in - lbs Max

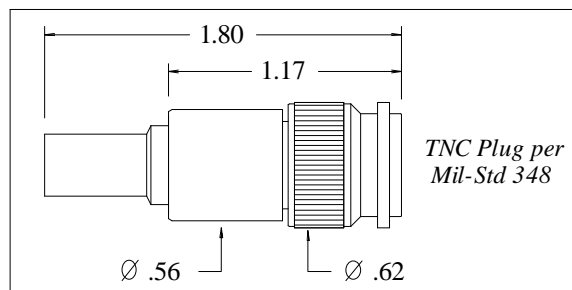

Features Not Shown : Safety Wire Holes, Gasket in Front

CONSTRUCTION

Materials:

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

Finish :

Body, Ferrule	Nickel
Center Contact	Gold

Applicable Standards

MIL-STD 348
MIL-PRF-39012

INSTALLATION

Crimp Tooling:

Center Contact	M22520 / 5 - 01 Tool, PIC 190518A Hex Crimp Die (.098 hex)
Crimp Ferrule	M22520 / 5 - 01 Tool, PIC 190518A Hex Crimp Die (.272/.340 hex)

** PIC 190518 Crimp Die Set superseded by PIC 190518A; either is acceptable for use with 190508 Connectors.*

CONNECTOR WEIGHT (Each)

1.15 ounces (32.60 grams)

RoHS COMPLIANT

Complies to RoHS Standards
