

PIC Wire & Cable*A Division of the Angelus Corporation*

Ph 262-246-0500

Fax 262-246-0450

PO Box 330 Sussex, WI 53089

Connector Specification**110578**

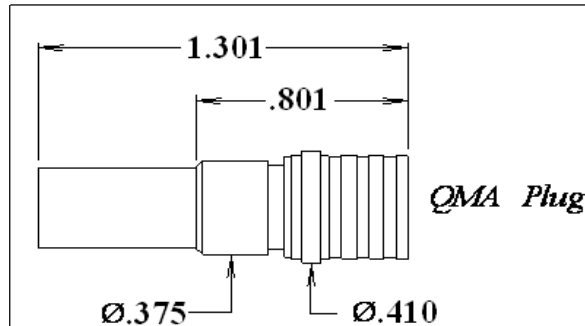
Approved



Date 03/09/10

Rev. 1 (8/6/10)

Distribution : USER

**QMA Straight Plug
for M14219**PERFORMANCE

Nominal Impedance	50 Ohms
Frequency Range	0 - 12.4 GHz
temperature range	-55 °C to 85 °C
Durability	1000 Cycles min

CONNECTOR WEIGHT

.256 ounces (7.26 grams)

Applicable Standards QMA interfaceRoHS COMPLIANT

Complies to RoHS standards

CONSTRUCTION*Materials:*

Body	Brass
Sleeve	Brass
Outer Contact	Copper Alloy
Center Contact	Brass
Ferrule	Copper Alloy
Insulators	PTFE

Finish :

Body	Nickel
Sleeve	Nickel
Outer Contact	Nickel
Ferrule	Nickel
Center Contact	Gold over Nickel

CONFIDENTIAL/PROPRIETARY: NEITHER THIS SPECIFICATION, NOR A PRODUCT OF THIS SPECIFICATION SHALL BE USED, COPIED, REPRODUCED OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF PIC WIRE & CABLE.