
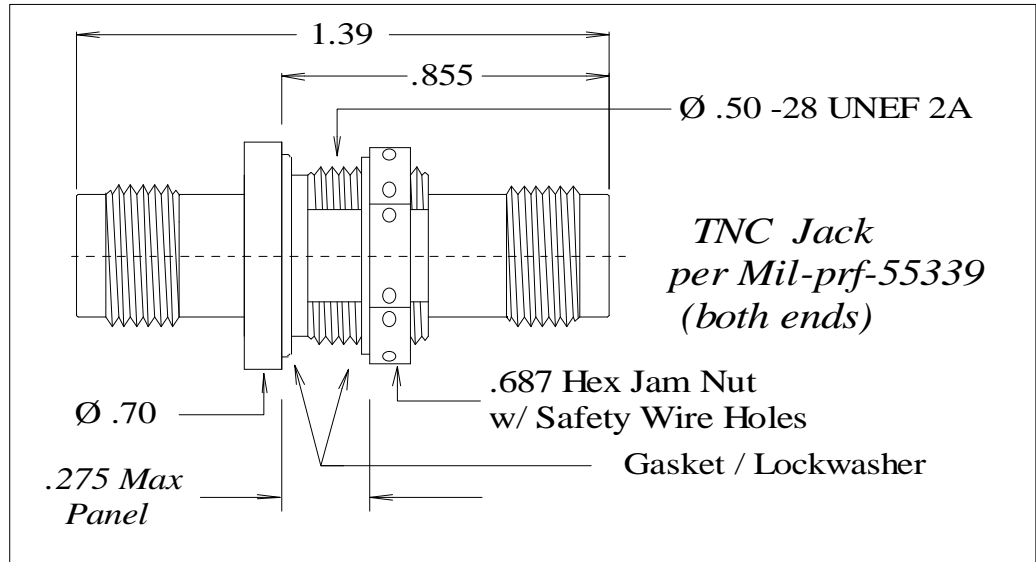


PIC Wire & Cable	Connector Specification	P/N 190012
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 06/06/07
	Distribution : USER	Rev. 5 (05/06/15)
		Uncontrolled if Printed

TNC Jack to Jack Bulkhead Adapter, 50 Ohm, Hermetically Sealed
w/safety wire holes



PERFORMANCE

Impedance : 50 Ohms nom
Frequency Rating : 0 - 12 GHz
Voltage Rating : 500 V (rms)
Insertion Loss : 0.14 F (GHz)
Insulation Resistance : 5000 MegOhms min
Temperature Rating : -40° C to +150° C

CONNECTOR WEIGHT (Each)

.82 ounces (23.25 grams)

RoHS COMPLIANT

Complies to RoHS Standards

APPLICABLE STANDARDS

MIL-PRF-55339, MIL-STD-348

CONSTRUCTION

Materials:

Connector Body : Brass, ASTM-B16,
Alloy UNS 36000, H02
Center Contact : Beryllium Copper, ASTM-B196,
Alloy UNS C17300
Dielectric : TFE Fluorocarbon, ASTM-D1710,
Type 1, Grade 1

Finish :

Body : Nickel
Center Contact : Gold

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

Not to scale

