
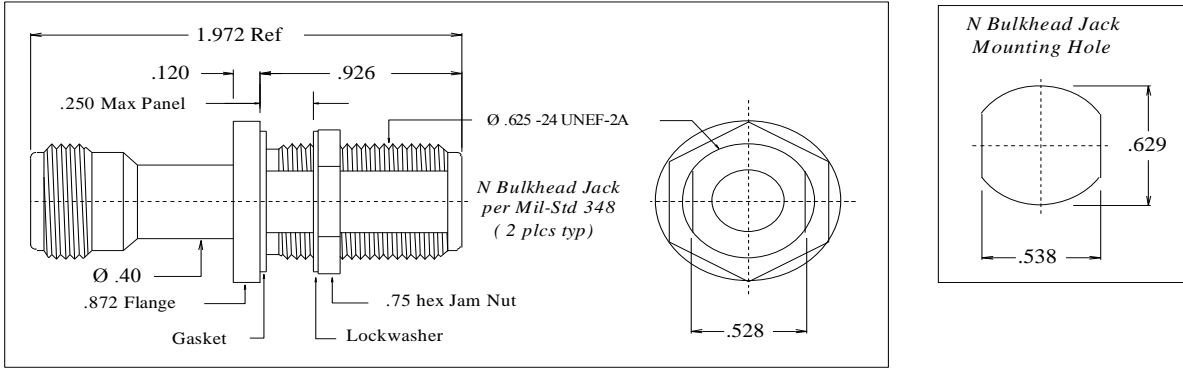


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>P/N 190013</b>
	Approved 	Date 09/24/07
	Distribution : USER	Rev. 2 (06/11/13) Uncontrolled Document

**N Jack to Jack Bulkhead Adapter,  
18 GHz, Hermetically Sealed**



**PERFORMANCE**

Impedance	50 Ohms
Frequency Range	0 - 18 GHz
Insertion Loss	0.6 dB Max up to 14.5 GHz
Voltage Rating	1000 VRMS
Amperage	1 Amp Max
Insulation Resistance	5000 Megohms
Hermetic Seal	per MIL-H-28719

**CONSTRUCTION**

<b>Materials:</b>	
Connector Body	Brass, ASTM-B16, Alloy UNS 36000
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Dielectric	TFE Fluorocarbon, ASTM-D1710
<b>Finish :</b>	
- Body	Nickel
- Center Contact	Gold
<b>Applicable Standards</b>	Mil-Std 348, MIL-PRF-39012

**CONNECTOR WEIGHT (Each)**

tbd

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.