

GARMIN GTS 825/855/8000 (TOP/BTM DIRECTIONAL) RF CABLE WORKSHEET


Cable (Test) Requirements :

Insertion Loss : 3.0 dB Max @ 1.09 GHz each cable.

(Note: 2.5 dB max when using low profile antenna)

VSWR : 1.5:1 max @ 1.09 GHz for each ant. cable.


Note: Each set of 4 antenna cables to be the exact same length.

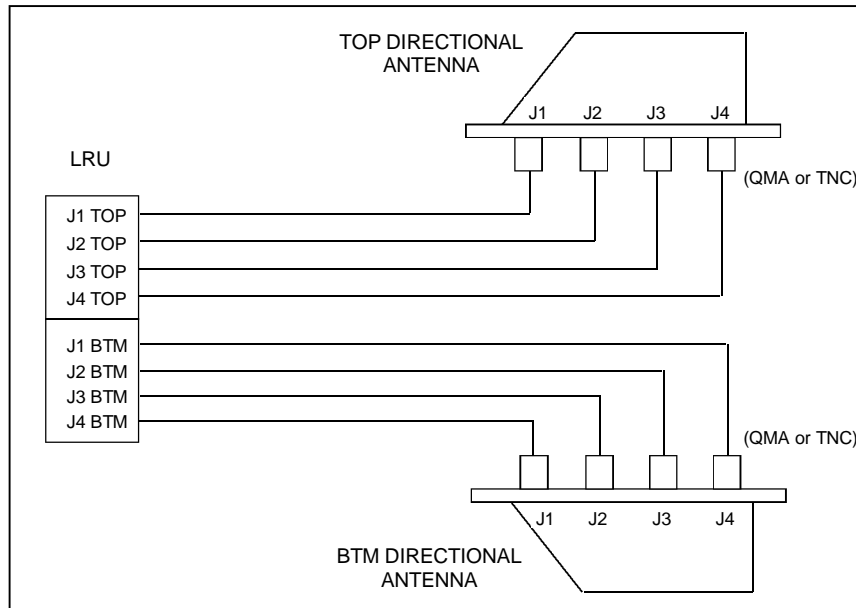

Connector Orientation

(Assemblies with (2) 90° Connectors)

Configuration Depicted : End B is **3:00** or **90°** from end A.

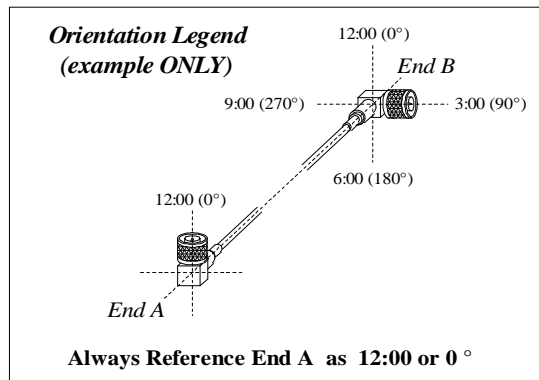

UPPER ANT. CABLE INFO:

UPPER ANT. CABLE LENGTHS : _____

CONN. TYPE/ANGLE @ UPR ANT : _____

CONN. ANGLE @ LRU : _____

CONN. ORIENTATION:
(See Below) _____

LOWER ANT. CABLE INFO:

LOWER ANT. CABLE LENGTHS : _____

CONN. TYPE/ANGLE @ LWR ANT : _____

CONN. ANGLE @ LRU : _____

CONN. ORIENTATION:
(See Below) _____

NOTE: DRAW LINE FOR DISC. & SPECIFY LENGHTS & CONN TYPES ON DWG TO LEFT.

QTY OF KITS : _____ (8 cables ea)

LABELING: Standard Labeling is P/N, S/N and connection Info.

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____