

PIC Wire & Cable

A Division of the Angelus Corporation

262-246-0500

Fax 262-246-0450

PO Box 330 Sussex, WI 53089

Connector Specification

Approved



Date 10/09/03

Rev. 2 (05/01/08)

Distribution : USER

110218

RCA Plug for V75268, V76261, V73263

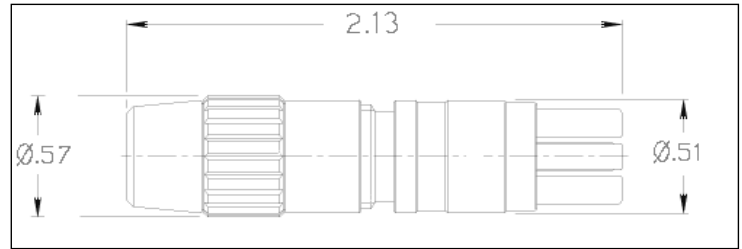

CABLE DIMENSIONS

A	Jacket (overall) O.D.	.122 / .125
B	Over-shields O.D.	.102 / .107
C	Dielectric O.D.	.086
D	Center conductor O.D.	.019

PERFORMANCE

Frequency Range	0 - 200 MHz
Voltage Rating	250 VAC
Insulation Resistance	1000 Megohms
Temperature Rating	- 30° to + 80° C


CONSTRUCTION

Materials:

Shell	Brass
Center Contact	Brass
Outer Contact	Brass
Chuck	Polyacetal POM
Dielectric	PBTP

Finish :

Shell	Black Finish
Center Contact	Gold Plated
Outer Contact	Gold Plated

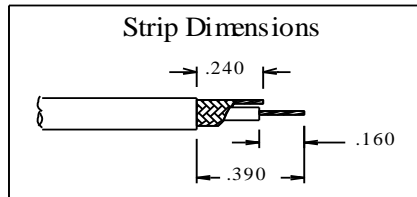

INSTALLATION

Center Contact & Shield: Soldered

Cable Retention : Threaded End Cap w/ Collett

CONNECTOR WEIGHT (Each)

2.10 ounces (59.54 grams)