


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> 262-246-0500      Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110236</b>
	Approved <i>MCT</i>	Date 09/25/00
	Distribution : USER	Rev. 8 (06/26/13) Uncontrolled Document

**D-Sub Size 8 Socket (Receptacle) Contact**  
for V75268 / V76261 / V73263

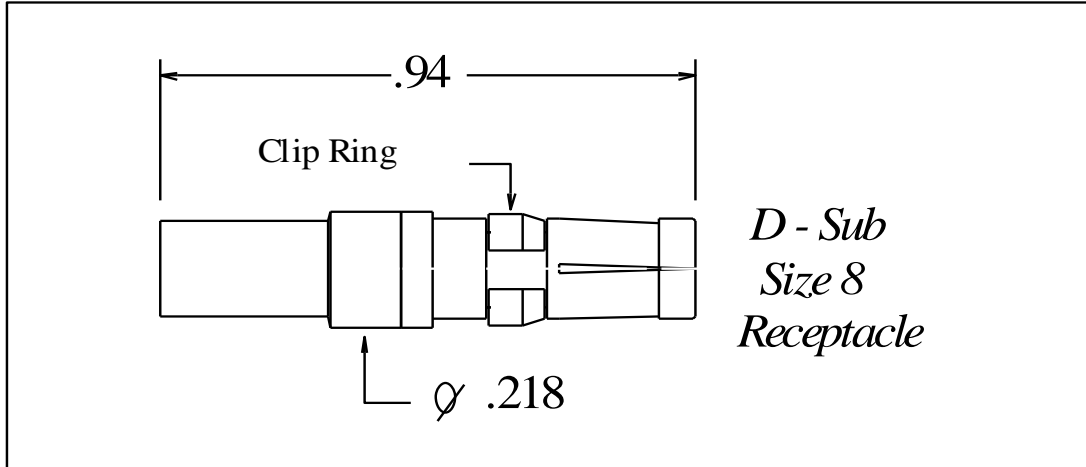

**PERFORMANCE**

Impedance :	33 Ohms nom.
Frequency Range	0 - 1000 MHz
Voltage Rating	1000 VRMS
Insulation Resistance	3000 Megohms

**CONNECTOR WEIGHT (Each)**

.09 ounces (2.55 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

<i>Center Contact</i>	M22520 / 2 - 01 Tool : Selector Dial @ # 5 Recommened Positioner : PIC # 110204, (Daniels # K817-3)
<i>Crimp Ferrule</i>	M22520/5 - 01 Tool : Die Set M22520 / 5 - 37 Cavity B (.151" hex) PIC P/N 110283, (Daniels # Y138)

**CONSTRUCTION**

***Materials:***

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 2, Grade 1, Class A
Clip Ring	Beryllium Copper, ASTM-B194

***Finish :***

Body, Center Contact, Ferrule	Gold
Clip Ring	Nickel

***Notes :***

- Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.*
- Recommended Removal Tools :*  
*Palco P/N T0100-K.*  
*Positronics P/N 4311-0-0-0*  
*ITT P/N CET-C6B*