
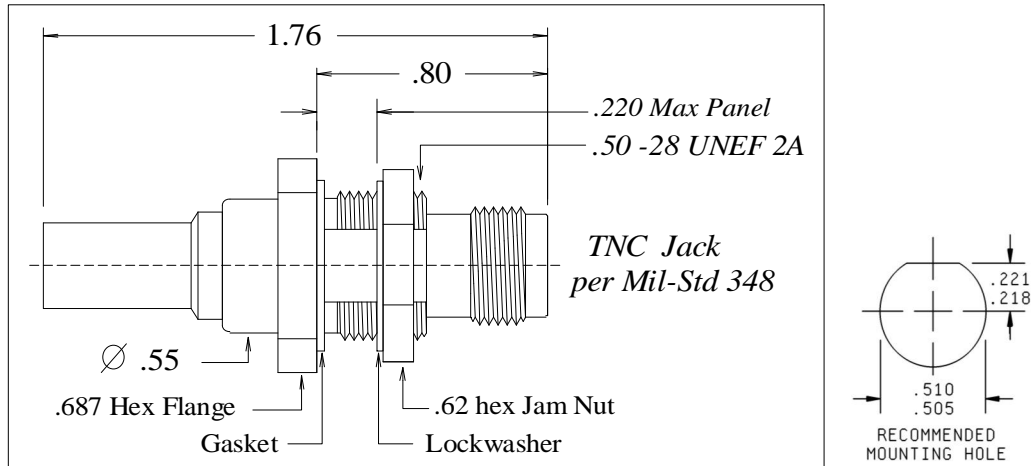


<b>PIC Wire &amp; Cable</b>	<b>Connector Specification</b>	<b>P/N 190521A</b>
A Division of the Angelus Corporation Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 09/12/02
	Distribution : USER	Rev. 5 (04/05/16)
		Uncontrolled if Printed

**TNC Bulkhead Jack**  
for S65161, S65161-A



**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	0 - 12 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

.96 ounces (27.22 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

<b>Pic Die Set</b>	<b>MIL Spec Die Set</b>
Center Contact	Center Contact
M22520 / 5 - 01 Tool,	M22520 / 5-01 Tool,
PIC 190518A Hex Crimp Die	MIL Spec *M22520 / 5-57
(.098 hex)	(.100 B hex)
<b>Crimp Ferrule</b>	<b>Crimp Ferrule</b>
M22520 / 5 - 01 Tool,	M22520 / 5-01 Tool,
*PIC 190518A Hex Crimp Die	MIL Spec *M22520 / 5-43
(.270/.340 hex)	(.268 A hex)

\* Note - MIL Spec die to be used on the smaller diameter area of ferrule only. Not the larger "Bell" area on end.

**CONSTRUCTION**

<b>Materials:</b>	
Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Hardware	Jam Nut, Lk WWshr, Grommet

**Finish :**

Body, Ferrule	Nickel
Center Contact	Gold

<b>Applicable Standards</b>	MIL-STD 348
	MIL-PRF-39012

**Notes :**

- 1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1905XXA Termination Instruction sheet for strip dimensions & instructions.