
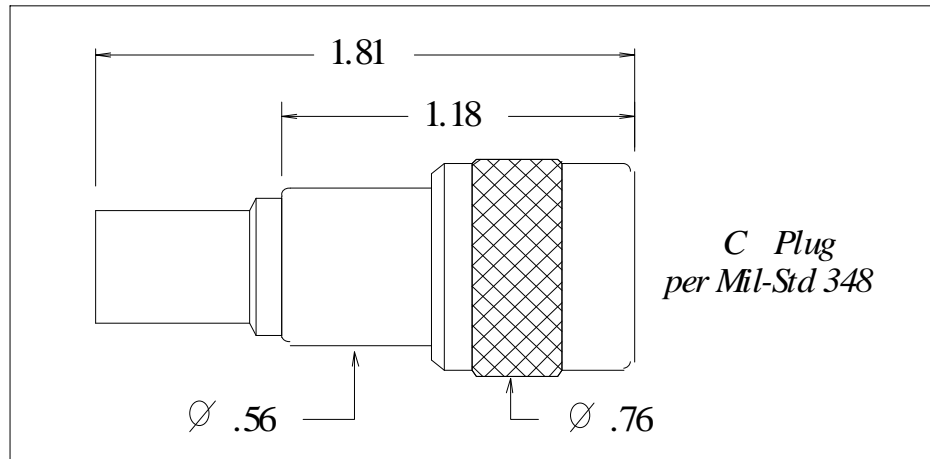


| | | |
|---|---|-----------------------|
| PIC Wire & Cable | Connector Specification | P/N 190606 |
| <i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089 | Approved :  | Date 11/03/03 |
| | Distribution : USER | Rev. 3 (06/18/14) |
| | | Uncontrolled Document |

C Straight Plug
for S55122



Features Not Shown : Gasket in Front

PERFORMANCE

| | |
|-----------------------|--------------|
| Nominal Impedance | 50 Ohms |
| Frequency Range | 0 - 12 GHz |
| Voltage Rating | 1000 VRMS |
| Insulation Resistance | 5000 Megohms |

CONNECTOR WEIGHT

1.32 ounces (37.42 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Pic Die Set

Center Contact

M22520 / 5 - 01 Tool,
*PIC 190618 Hex Crimp Die
(.098 hex)

Crimp Ferrule

M22520 / 5 - 01 Tool,
*PIC 190618 Hex Crimp Die
(.359/.432 hex)

MIL Spec Die Set

Center Contact

M22520 / 5-01 Tool,
MIL Spec *M22520 / 5-57
(.100 B hex)

Crimp Ferrule

M22520 / 5-01 Tool,
MIL Spec *M22520 / 5-47
(.359 A hex)

CONSTRUCTION

Materials:

| | |
|----------------|--|
| Body | Brass, ASTM-B16, Alloy UNS 36000, H02 |
| Center Contact | Brass, ASTM-B16, Alloy UNS 36000, H02 |
| Ferrule | Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included |
| Dielectric | TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1 |

Finish :

| | |
|----------------|--------|
| Body, Ferrule | Nickel |
| Center Contact | Gold |

Applicable Standards

MIL-STD 348
MIL-PRF-39012

Notes :

- 1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-190XXX Termination Instruction sheet for strip dimensions & instructions.

* Note - MIL Spec die to be used on the smaller diameter area of ferrule only. Not the larger "Bell" area on end.

PIC Wire & Cable Connector User specification sheets are non-controlled documents. Please contact PIC Wire and Cable or visit the PIC website (www.picwire.com) to ensure the latest revision of the drawing is being viewed.