
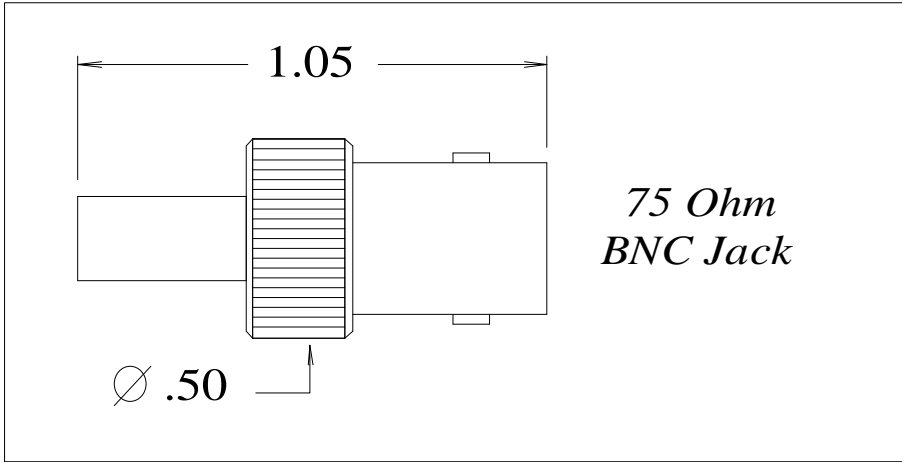


<b>PIC Wire &amp; Cable</b>	<b>Connector Specification</b>	<b>P/N 190727</b>
A Division of the Angelus Corporation Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved 	Date : 08/07/01
	Distribution : USER	Rev. 5 (01/27/14) Uncontrolled Document

**BNC Straight Jack**  
for V75268, V76261, V73263



**PERFORMANCE**

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

.38 ounces (10.77 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

<i>Center Contact</i>	M22520 / 2 - 01 Tool, Selector Dial @ # 5 Recommended Positioner : PIC 110201 (Daniels K1300)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, M22520 / 5-41, B Hex Crimp Die (.178 hex). PIC P/N 110333

**CONSTRUCTION**

***Materials:***

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft,
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

***Finish :***

Body, Ferrule	Nickel
Center Contact	Gold

***Applicable Standards***

MIL-STD 348
MIL-PRF-39012

***Notes :***

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.