
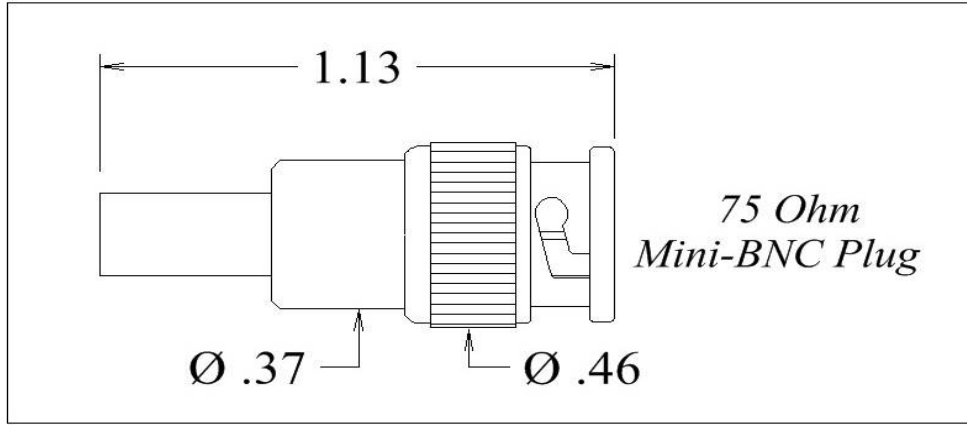


<b>PIC Wire &amp; Cable</b>	<b>Connector Specification</b>	<b>P/N 190745</b>
<i>A Division of the Angelus Corporation</i> Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089	Approved : 	Date : 10/04/10
	Distribution : USER	Rev. 3 (01/13/15) Uncontrolled if Printed

**Mini-BNC Straight Plug**  
for V73263, V75268, V76261 cables



*Features Not Shown: Gasket in front*

**PERFORMANCE**

Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	300 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

.28 ounces (8.16 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

**Crimp Tooling:**

<i>Center Contact</i>	M22520 / 2 - 01 Tool, Selector Dial @ 8 Reccommended Positioner : PIC 110918 (DMC K1969)
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool, M22520 / 5-41, B Hex Crimp Die (.178 hex). PIC P/N 110333

**CONSTRUCTION**

**Materials:**

Body	Brass, ASTM-B16
Center Contact	Brass, ASTM-B16
Outer Contact	Beryllium Copper, ASTM-B196
Ferrule	Brass, ASTM-B16
Dielectric	TFE Fluorocarbon, ASTM-D4894

**Finish :**

Body, Ferrule	Nickel
Center Contact	Gold

**Notes :**

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.