

CABLE CONSTRUCTION

1. PTFE Jacket (White) Laser Markable
2. Silver-Plated Copper Shield
3. Fluoropolymer Tape Binder
4. Fluoropolymer Fillers
5. Solid PFA Conductor Insulation
6. 26 AWG Silver-Plated High Strength Copper Alloy Conductors

COLOR CODES


Pair #1 - White/Blue

DataMATES Lite ethernet cables incorporate innovative design features that provide maximum electrical performance in a small, light weight and flexible package. Using 26 AWG silver-plated, high strength copper alloy conductors and a laser markable PTFE jacket, PIC's E13226 delivers CAT 5e performance up to 224 ft with up to 45% less weight and up to 50% more flexibility.

Data transmission aboard aircraft faces more severe environmental and EMI situations than conventional LAN systems in commercial buildings, hence special measures have been taken to preserve technical performance. Silver-plated copper conductors and shielding assure uniform conductivity with excellent solderability. An PTFE jacket protects the cable against abrasion and environmental effects while maintaining flexibility for ease of installation.

E13226 is ideal for harsh environment applications that demand high reliability, maximum flexibility and light weight, such as cabin management, in-flight entertainment, internet backbones. It is Skydrol resistant, RoHS compliant and passes the FAA flammability requirements of FAR Part 23 and 25, Appendix F.

PIC  **DataMATES® LITE**

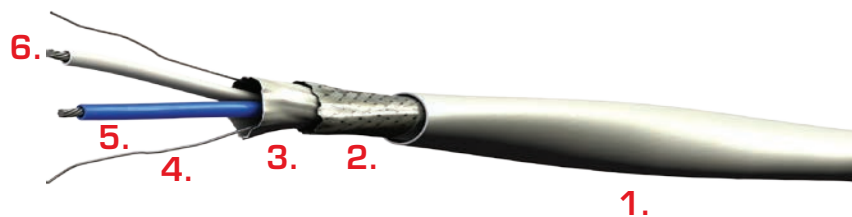

PHYSICAL DATA

- Conductors 26 AWG (19/38) Stranded SPCA
- Shield Coverage 80% (Braid)
- Operating Temperature -55° to +200°C
- Outer Diameter: in (mm) 0.13 (3.40)
- Minimum Bend Radius: in (mm) 0.40 (10.16)
- Weight: lbs/100 ft (kg/100 m) 1.7 (2.5)

ELECTRICAL DATA

- Impedance: ohms 100
- Capacitance: pF/ft (m) 14.5 (47.6)
- Velocity of Propagation: % 70.0
- Dielectric Voltage Rating (kV RMS) 1.5
- DC Resistance: ohms/1000 ft (m) Max 44.8 (147.0)
- Max Distance*: ft (m) 224 (68)
- Attenuation: Nom / Max dB/100 ft (dB/100 m)
 - @10 MHz 2.7 / 3.1 (8.9 / 10.2)
 - @100 MHz 8.7 / 10.5 (28.5 / 34.4)

All values nominal unless otherwise noted
 *Note: The max distance is based on maximum channel insertion loss per ANSI/TIA-568-C.2

