

CABLE CONSTRUCTION

1. PTFE Jacket (White) Laser Markable
2. Silver-Plated Copper Shield
3. Foil Shield
4. PTFE Tape
5. PFA Insulation
6. Fluoropolymer Spline
7. Silver-Plated Copper Conductors


COLOR CODES

- Pair #1 - Blue, White/Blue
- Pair #2 - Orange, White/Orange
- Pair #3 - Green, White/Green
- Pair #4 - Brown, White/Brown

DataMATES Lite ethernet cables incorporate innovative design features that provide maximum electrical performance in a small, light weight and flexible package. Using 24 AWG stranded silver-plated, copper conductors and a laser markable PTFE jacket, PIC's E6A3824 delivers 10 Gigabit (ANSI/TIA-568 Category 6a) performance up to 246 ft.

Data transmission aboard aircraft faces more severe environmental and EMI situations than conventional LAN systems in commercial buildings, hence special measures have been taken to preserve technical performance. Silver-plated copper conductors and shielding assure uniform conductivity with excellent solderability. A PTFE jacket passed EN3475-503 Scrape Abrasion testing and is also very flexible for ease of installation.

E6A3824 is ideal for harsh environment applications that demand high reliability, maximum flexibility and light weight, such as cabin management, in-flight entertainment, internet backbones. It is Skydrol resistant, RoHS compliant and passes the FAA flammability requirements of FAR Part 23 and 25, Appendix F.

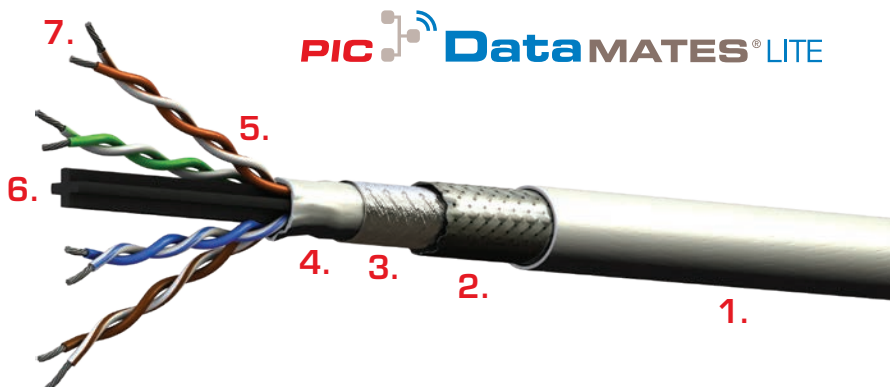

PIC  **DataMATES® LITE**

PHYSICAL DATA

- Conductors 24 AWG Stranded SPC
- Shield Coverage 100% (Foil), 80% (Braid)
- Operating Temperature -55° to +200°C
- Outer Diameter: in (mm) 0.26 (6.60)
- Minimum Bend Radius: in (mm) 0.78 (19.81)
- Weight: lbs/100 ft (kg/100 m) 4.6 (6.8)

ELECTRICAL DATA

- Impedance: ohms 100
- Capacitance: pF/ft (m) 14.5 (47.6)
- Velocity of Propagation: % 70.0
- Dielectric Voltage Rating (kV RMS) 1.5
- DC Resistance: ohms/1000 ft (m) Max 28.5 (93.5)
- Max Distance*: ft (m) 246 (75)
- Attenuation: Nom / Max dB/100 ft (dB/100 m)

- @10 MHz 2.3 / 2.6 (7.5 / 8.5)
- @100 MHz 7.0 / 8.4 (23.0 / 27.6)
- @250 MHz 11.4 / 13.7 (37.4 / 44.9)
- @500 MHz 16.5 / 20.0 (58.1 / 65.6)

*All values nominal unless otherwise noted
Note: The max distance is based on maximum channel insertion loss per ANSI/TIA-568-C.2



| Description | Connector P/N | Tool P/N |
|--|--------------------------------|-----------------------------------|
| Shielded CAT 6, Plug w/ATUM Strain Relief | 110506 | 110288 - RJ45 Crimp Tool |
| Shielded CAT 6, Plug w/Strain Relief Sleeve | 110629 | 110288 - RJ45 Crimp Tool |
| Shielded CAT 6, Plug w/Protective Boot | 110630 | 110288 - RJ45 Crimp Tool |
| Shielded CAT 6, Plug w/ATUM Strain Relief (fits Amphenol (RJF) ruggedized backshell) | 110789 | 110288 - RJ45 Crimp Tool |
| Shielded CAT 6a, Plug w/ATUM Strain Relief | 110973 (568A) 110975 (568B) | 110701 - Soft Jaw Clamping Pliers |
| Shielded CAT 6a, 90° Plug w/ATUM Strain Relief | 110912 (568A) 110900 (568B) | 110701 - Soft Jaw Clamping Pliers |
| Shielded CAT 6a, Jack w/ATUM Strain Relief | 110937 (568A) 110938 (568B) | 110701 - Soft Jaw Clamping Pliers |
| Siemon CAT 7 (Tera) Plug, 4 Pair, 24 AWG | 110807* | 110701 - Soft Jaw Clamping Pliers |
| Siemon CAT 7 (Tera) Jack, 4 Pair, 24 AWG | 110808* | 110701 - Soft Jaw Clamping Pliers |

E6A3824 is a Category 6a (10Gb) ethernet cable that can be terminated in a variety of ways.

E6A3824 may also be terminated into miniature circulator connectors such as the Mighty Mouse connector made by GlenAir. These connectors provide a durable ruggedized solution option to the RJ45. Contact PIC Wire & Cable for more information about these connectors.



**Call PIC For Availability*

