

PIC F20424

150 OHM QUAD FIBRE CHANNEL CABLE

PRODUCT BULLETIN

CABLE CONSTRUCTION

1. Extruded FEP Jacket (Translucent Blue)
2. Tin-Plated Copper Shield
3. Foil Shield
4. Foam FEP Insulation
5. Filler
6. Stranded Silver-Plated Copper Conductors

COLOR CODES

Pair #1 - Red, Black
Pair #2 - Blue, Green


This cable has been specially designed by PIC for airborne high-speed data applications. It is an approved cable by Honeywell for the EPIC/APEX System.

Data transmission aboard aircraft faces more severe environmental and EMI situations than conventional LAN systems in commercial buildings, hence special measures have been taken to preserve technical performance.

Each conductor is surrounded by a foam FEP insulation and is designed to be terminated in ARINC 600 and 38999 quadrax contacts.

An FEP jacket protects the cable against abrasion and environmental effects while maintaining flexibility for ease of installation.

F20424 is Skydrol resistant, RoHS compliant and passes the FAA flammability requirements of FAR Part 23 and 25, Appendix F. Test results are available upon request.

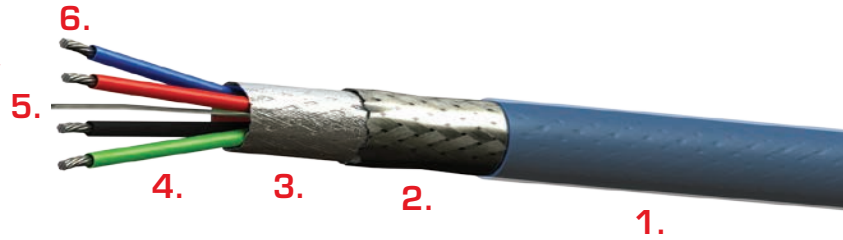

PHYSICAL DATA

• Conductors	24 AWG Stranded SPC
• Shield Coverage	90% Min.
• Operating Temperature	-55° to +150°C
• Outer Diameter: in (mm)	0.24 (6.15)
• Minimum Bend Radius: in (mm)	1.20 (30.48)
• Weight: lbs/100 ft (kg/100 m)	3.7 (5.4)

ELECTRICAL DATA

• Impedance: ohms	150
• Capacitance: pF/ft (m)	8.5 (24.9)
• Velocity of Propagation: %	80.0
• Dielectric Voltage Rating: KV RMS	1.5
• DC Resistance: ohms/1000 ft (m) Max	26.2 (86.0)
• Attenuation: dB/100 ft (m)	Max
• @ 500 MHz	12.2 (40.0)

All values nominal unless otherwise noted



N53 W24747 S. Corporate Circle
P.O. Box 330, Sussex, WI 53089-0330

P • 262.246.0500 Toll Free • 800.742.3191
F • 262.246.0450

WWW.PICWIRE.COM

ISO 9001 • AS 9100



AIRCRAFT ELECTRONICS
ASSOCIATION
MEMBER

NBAA

v.080315