

# PIC D611122

## HONEYWELL LIGHTNING SENSOR SYSTEM

# PRODUCT BULLETIN

## CABLE CONSTRUCTION


1. FEP Jacket (Clear)
2. Tinned Copper Braid Shields
3. ETFE Insulations & Jackets
4. Tinned Copper Conductors

## COLOR CODES

- Pair #1: White Jacket, White, Light Blue  
 Pair #2: Black Jacket, White, Light Blue  
 Pair #3: Red Jacket, White, Light Blue  
 Pair #4: Blue Jacket, White, Light Blue  
 Triad: Green Jacket, White, White/Blue, White/Orange

This eleven conductor cable (4 pairs, 1 triad) is approved and recommended by the Sperry Commercial Flight Systems Division of Honeywell, Inc. for their LSZ 850 system. It is for interconnecting the antenna (AT 850) to the processor (LP 850); then to the controller (LU 850). It is approved by Honeywell for the APEX/EPIC system.

D611122 cable is Skydrol resistant, RoHS compliant and passes the FAA flammability requirements of FAR Part 23 and 25, Appendix F. Test results are available upon request.

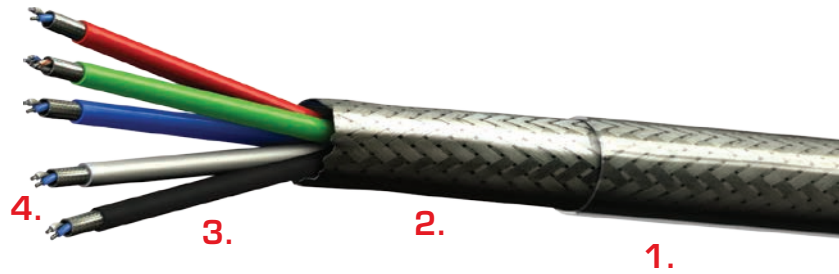

## PHYSICAL DATA

- Conductors 22 AWG x 19 strands
- Insulation & Inner Jackets ETFE
- Shields 95% Min.
- Outer Jacket FEP
- Operating Temperature -55° to +150°C
- Outer Diameter: in (mm) 0.45 (11.43)
- Minimum Bend Radius (in.) 4.50 (114.30)
- Weight: lbs/100 ft (kg/100 m) 14.5 (21.6)

## ELECTRICAL DATA

- Impedance: ohms\* 70
- Voltage Rating (volts) 600

*\*per MIL-C-915 (pairs only)*

*All values nominal unless otherwise noted*



N53 W24747 S. Corporate Circle  
 P.O. Box 330, Sussex, WI 53089-0330

P • 262.246.0500 Toll Free • 800.742.3191  
 F • 262.246.0450

**WWW.PICWIRE.COM**

ISO 9001 • AS 9100



v.091115