



To provide high bandwidth for data and support satellite communications, PIC Wire & Cable is once again advancing the market. Like all our 50 ohm RF Cables, our new High Frequency Cables feature minimum 200°C on all materials and with over 40 years of design and manufacturing expertise our high frequency cables reduce weight, decrease loss and improve EMI performance.

Designed specifically to serve Ku Band & X Band Applications, our new MicroMATES Cables feature: Inner Flat Braid or Strip Braid; High Temp Polyimide Foil; Dual Braided Shields; and Silver Plated Copper throughout—**everything to make your job easier and your platform more productive.**

Custom Cable Assemblies

Proper cable assembly is critical to realizing the full benefits of the cable and connector technology. Our special tooling and specialized technicians ensure your job is done to precision. Maximize the performance of your Microwave Cables with:

- Certified Test Process & Equipment
- Phase-matched Ship Sets
- Qualified Assembly Experts
- ISO 9001; AS 9100 Certification
- Complete Lot Traceability
- Improved Supply Chain Efficiency

HIGH FREQUENCY SOLUTIONS

Attribute Overview

Coaxial Cable	Max Freq	Size	EMI Resist	Loss	Weight	Flex Life
HT77300F	18GHz	Small	High	Low	Light	Very High
HT77210F	26GHz	Very Small	High	Low	Light	Very High
HH85295F	18GHz	Small	Very High	Very Low	Light	High
HH85210F	26GHz	Very Small	Very High	Very Low	Light	High

See Back for Connector and Physical & Electrical Data

2 WEEK LEAD TIME OR LESS ON MANY ASSEMBLIES


Call 800.742.3191 Regarding MicroMATES® Availability



MILITARY • CORPORATE • COMMERCIAL



Electromagnetic Spectrum

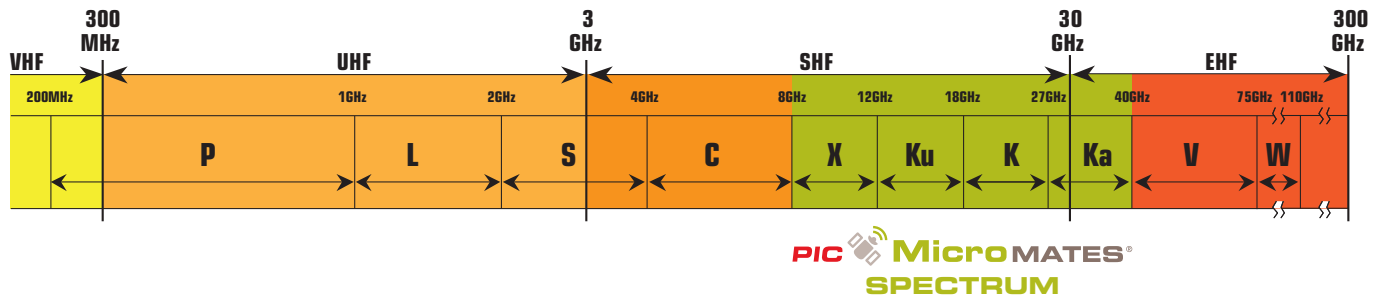

Physical and Electrical Data

Coaxial Cable	VOP	Cable O.D. in (mm)	Weight lbs/100 ft (kg/100 m)	Temperature Range (°C)	Shielding Effectiveness (dB)	Loss @ 1 GHz dB/100 ft (dB/100 m)	Loss @ 12 GHz dB/100 ft (dB/100 m)	Loss @ 18 GHz dB/100 ft (dB/100 m)
HT77300F	77.0%	0.30 (7.62)	8.8 (13.1)	-55/+200	-90	5.0 (16.4)	19.5 (64.0)	24.7 (81.0)
HT77210F	76.5%	0.21 (5.28)	4.5 (6.7)	-55/+200	-90	7.6 (24.9)	29.5 (96.8)	37.3 (122.4)
HH85295F	84.0%	0.30 (7.49)	8.6 (12.8)	-55/+200	-110	4.2 (13.8)	15.2 (49.9)	19.0 (62.3)
HH85210F*	85.0%	0.21 (5.33)	4.4 (6.5)	-55/+200	-90	6.0 (19.7)	22.9 (75.1)	28.9 (94.8)

*Preliminary numbers

All values nominal unless otherwise noted

Connector Data

HT77300F	HT77210F	HH85295F	HH85210F	CONNECTOR TYPE
120208	120508	120608	120708	TNC Straight Plug
120209	120509	120609	120709	TNC 90 Degree Plug
120221	120521	120621	120721	TNC Bulkhead Jack
120210	120510	120610	120710	N Straight Plug
120211	120511	120611	120711	N 90 Degree Plug
120222	120522	120622	120722	N Bulkhead Jack
120214	120514	120614	120714	SMA Straight Plug
120215	120515	120615	120715	SMA 90 Degree Plug
N/A	120534	N/A	N/A	BMB Jack Snap Mount
N/A	120535	N/A	N/A	BMB SZ 5 Jack

Call PIC For Other Connector Availability

TAKE FLIGHT WITH PIC WIRE & CABLE INTERCONNECT PRODUCTS
 2 WEEK LEAD TIME OR LESS ON MANY ASSEMBLIES • 800.742.3191