



60 DEGREE BUNSEN BURNER TEST FOR WIRE 14 CFR Part 25.869 (a)(4) Amdt 25-113 Appendix F Part I (a)(3)	Skandia, Inc WO# 353370-19 Client PO 22509N
Pic Wire & Cable N53 W24747 S. Corporate Circle Sussex WI 53089 USA	Doc ID 60DEG-423599 Test Plan # Rev Project # Technician Olivia Mosqueda

AIRCRAFT OR AIRCRAFT COMPONENT IDENTIFICATION

Make: Stock	Model:	Serial: N/A	Tail:
-------------	--------	-------------	-------

Conditioning Room Data: Date In: 01/24/2019 Time In: 10:05 AM Date Out: 01/28/2019 Time Out: 8:44 AM

SPECIMEN MATERIALS

Part No: **USB3-2624-9**
 PIC Wire & Cable: Cable, White, Wire Gauge 26/24

Lot No: BE8213

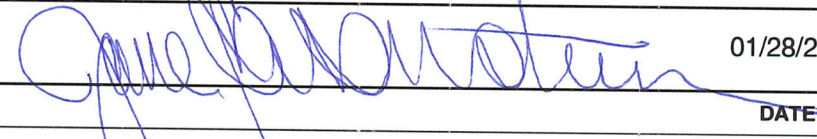
Test Set	Flame Application (seconds)	Flame Time (seconds)	Burn Length (inches)	Drip Flame Time (seconds)
1	30	0.0	1.6	0.0
2	30	0.0	1.7	0.0
3	30	0.0	1.7	0.0
Average:		0.0	1.7	0.0

*60 Degree Bunsen Burner Test (30 Seconds): Average Flame time shall not exceed 30 seconds.
 Average Burn Length may not exceed 3 inches. Average Drip Flame Time may not exceed 3 seconds after falling.*

Comments: This data sheet supersedes the previous dated 1/28/2019 to correct part number.

Passed
 Failed

CERTIFICATION: I certify that after testing these specimens, the above results were obtained in accordance with the procedures and equipment specified by Code of Federal Regulations Title 14 Part 25, or the Aircraft Materials Fire test handbook. Not FAA approved unless an 8110-3 has been issued.

DER Jane Biberstein 	01/28/2019
WITNESS	DATE