


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : 

Date : 05/14/01
 Rev : 5 (08/09/19)


Distribution : USER

Uncontrolled if Printed

D-Sub Size 8 Socket (Receptacle) Contact

for S83204, S86208 / S88207

Note: Use with PIC P/N 110286, D-Sub Size 8 (Pin) Contact

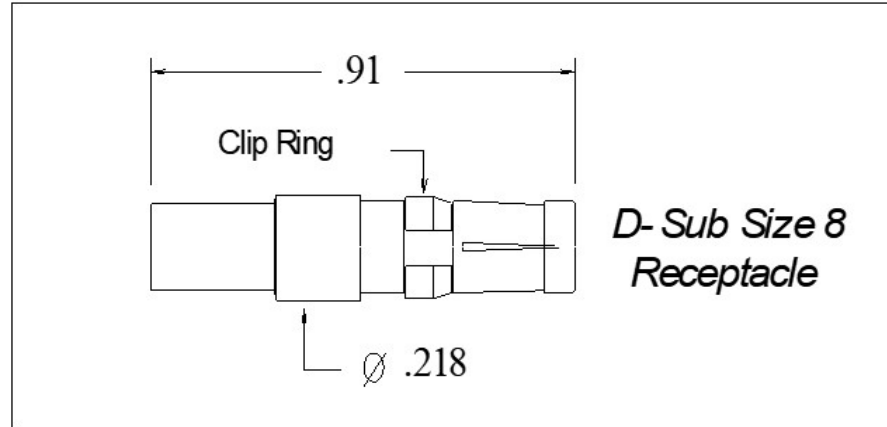

PERFORMANCE

Impedance : Non-constant
 Frequency Range : 0 - 1 GHz
 Insertion Loss (max) : 0.5 dB
 Voltage Rating : 1000 V(rms)
 Insulation Resistance : 5000 Megohms min.
 DW Voltage : 1500 V(rms)

CONNECTOR WEIGHT (Each)

0.09 ounces (2.55 grams)

RoHS Compliant

Complies with RoHS Standards

INSTALLATION (Tooling)

Center Contact

M22520 / 2 - 01 Crimp Tool :
 Selector Dial @ # 7
 Recommended Positioner :
 PIC P/N 110254, (Daniels # K426)

Crimp Ferrule

M22520 / 5 - 01 Crimp Tool :
 Die Set M22520 / 5 - 41
 Cavity B (.178" hex)
 PIC P/N 110333, (Daniels # Y140)

CONSTRUCTION

Materials:

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 2, Grade 1, Class A
Clip Ring	Beryllium Copper, ASTM-B194

Finish :

Body, Center Contact, Ferrule	Gold
Clip Ring	Nickel

APPLICABLE STANDARDS

DSCC Specification 89059
 MIL-DTL-24308

Notes :

- 1) Please refer to T-DSub 50 Termination Instruction sheet for strip dimensions & instructions.
- 2) Recommended Removal Tools :
 Palco P/N T0100-K.
 Positronics P/N 4311-0-0-0
 ITT P/N CET-C6B