

A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 PO Box 330 Sussex, WI 53089

Approved : *MCT*

Date : 09/25/00

Rev : 10 (10/12/18)


Distribution : USER

Uncontrolled if Printed

D-Sub Size 8 Socket (Receptacle) Contact

(for V75268 / V76261 / V73263)

Note : Use with PIC PN 110235 Contact Only

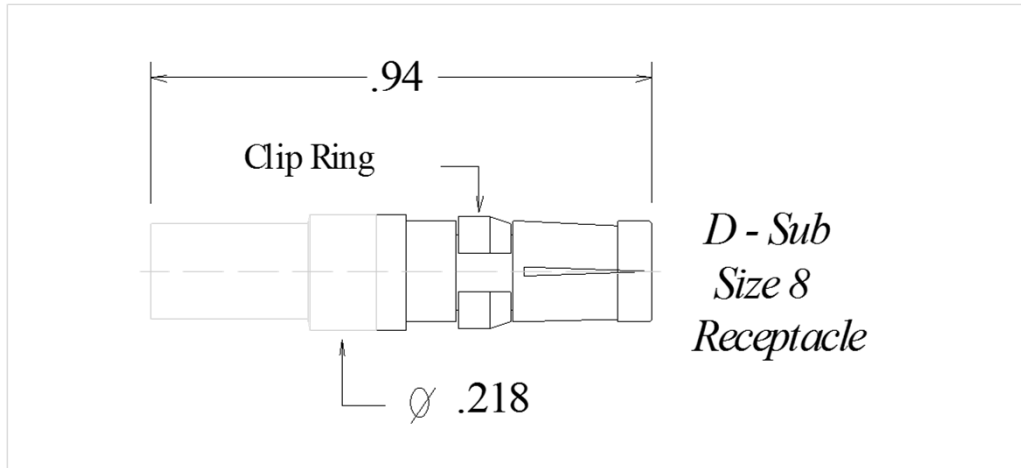

PERFORMANCE

Impedance : 75 Ohms
 Frequency Range : 0 - 2 GHz
 Insertion Loss : 0.5 dB max @ 2 GHz
 Voltage Rating : 1000 V (rms)
 Insulation Resistance : 5000 Megohms min.
 DW Voltage : 1500 Megohms min.

CONNECTOR WEIGHT (Each)

0.09 ounces (2.55 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Center Contact

M22520/2-01 Tool, Dial Setting #5
 Positioner : PIC PN 110204 (Daniels K817-3)

Crimp Ferrule

M22520 / 5 - 01 Tool
 Die Set M22520 / 5 - 37
 Cavity B (.151" hex)
 PIC P/N 110283, (Daniels # Y138)

CONSTRUCTION

Materials:

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	PTFE Fluorocarbon, ASTM-D1457
Clip Ring	Beryllium Copper, ASTM-B194

Finish :

Body, Contact, Ferrule	Gold, MIL-G-45204
Clip Ring	Nickel, QQ-N-290

APPLICABLE STANDARDS

DSCC Specification 89059

Notes :

1) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.

2) Recommended Removal Tools :

Palco P/N T0100-K, Positronics P/N 4311-0-0-0,
 or ITT P/N CET-C6B