

PIC Wire & Cable

A Division of the Angelus Corporation

Ph 262-246-0500

Fax 262-246-0450

PO Box 330 Sussex, WI 53089

Connector Specification**110677**

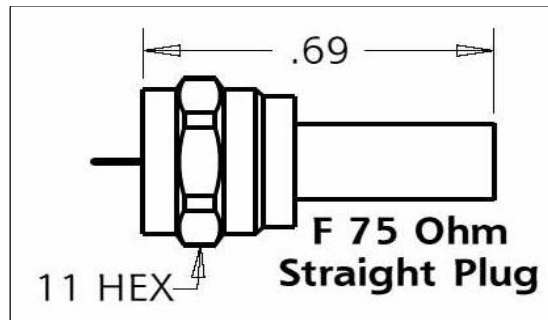
Approved

TVH

Date 01/13/12

Rev. 0

Distribution : USER

F Straight Plug
for V73263, V75268, and V76261PERFORMANCE

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	325 VRMS

CONSTRUCTION*Materials:*

Body	Brass
Center Contact	Brass
Ferrule	Brass
Dielectric	PTFE

Finish :

Body, Ferrule	Nickel
Center Contact	Gold

INSTALLATION*Crimp Tooling:*

Center Contact	M22520 / 2 - 01 Tool, Selector @ # 5 Recommended Positioner : DMC # K850
Crimp Ferrule	M22520 / 5 - 01 Tool, with M22520 / 5 - 41 Hex Crimp Die, (.178" hex)

*Includes Raychem ATUM 8/2 x 1.5" Lg. Dual-Wall Shrink Tube*CONNECTOR WEIGHT (each)

tdb

RoHS COMPLIANT

Complies to RoHS Standards