

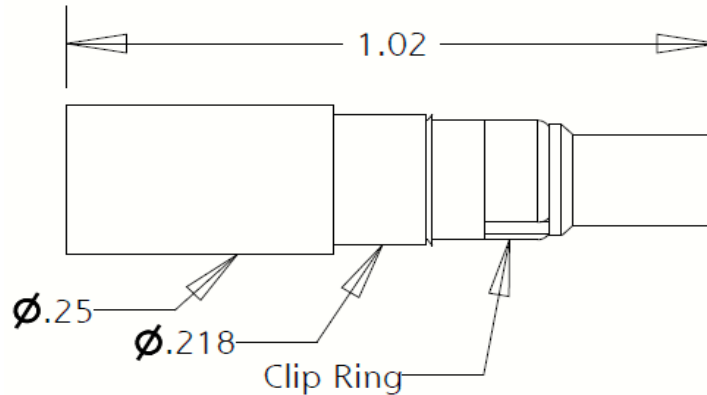
A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 PO Box 330 Sussex, WI 53089

Approved :   
 Distribution : USER

Date : 10/10/18  
 Rev : 0  
 Uncontrolled if Printed

**D-Sub Size 8 Pin Contact**

(for UH44193)

*Note : Use with PIC PN 150164 Socket Contact Only***PERFORMANCE**

Impedance : Non-Constant  
 Frequency Range : 0 - 2 GHz  
 Insertion Loss (max) : 0.5 dB @ 2 GHz.  
 Voltage Rating : 1000 V(rms)  
 Insulation Resistance : 5000 Megohms min.  
 Dielectric Withstanding Voltage : 1500 V(rms)

**CONNECTOR WEIGHT (Each)**

0.12 ounces (3.40 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION (Tooling)****Center Contact :**

M22520/2-01 Tool, selector dial @ #8  
 Positioner: PIC PN 110205 (Daniels K224-1)

**Crimp Ferrule :**

M22520 / 5-01 Tool  
 M22520 / 5-03 Die Set  
 (.213" A hex)

**CONSTRUCTION****Materials:**

Body : Brass, ASTM-B16,  
 Alloy UNS 36000, H02  
 Center Contact : Beryllium Copper, ASTM-B196,  
 Alloy UNS C17300  
 Ferrule : Brass, ASTM-B16,  
 Alloy UNS 36000, Dead Soft  
 Dielectric : PTFE Fluorocarbon, ASTM-1457  
 Clip Ring : Beryllium Copper, ASTM-B194

**Finish :**

Body, Contact, Ferrule : Gold, MIL-G-45204  
 Clip Ring : Nickel, QQ-N-290

**APPLICABLE STANDARDS**

DSCC SPEC 89058

**Notes :**

- 1) Please refer to T-150163 Termination Instruction sheet for strip dimensions & instructions.
- 2) Recommended Removal Tools :  
 Palco P/N T0100-K, Positronics P/N 4311-0-0-0  
 or ITT P/N CET-C6B