


A Division of the Angelus Corporation
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com
 N220 W1051 Springdale Road, Waukesha, WI 53186

Approved : *FMB*
 Distribution : USER

Date : 03/02/15
 Rev. 4 (06/23/22)
 Uncontrolled if Printed

N Type 50 Ohm Straight Plug
 for UH22089

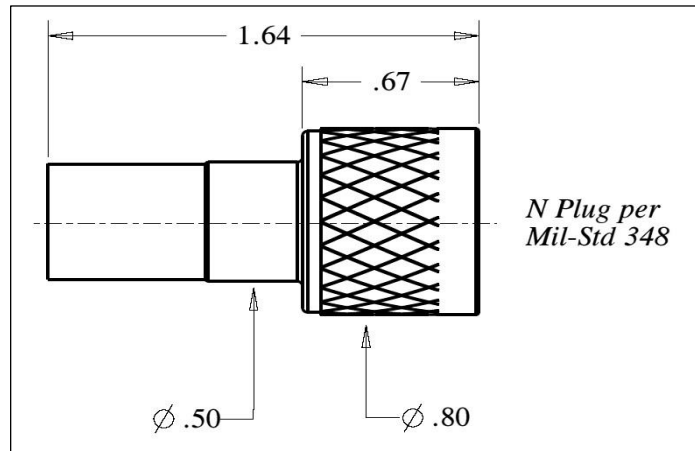

Features Not Shown : Safety Wire Holes, Gasket in Front

PERFORMANCE

Nominal Impedance : 50 Ohms
 Frequency Range : 0 - 12 GHz
 Voltage Rating : 1000 V(rms)
 Insulation Resistance : 5000 Megohms
 DW Voltage : 1500 V (rms)
 Insertion Loss (max) : 0.17 dB max @ 12 GHz
 Insertion Loss : $0.05 \sqrt{F(\text{GHz})}$
 Temperature Rating : -65° to +165° C

CONNECTOR WEIGHT (Each)

1.34 ounces (37.87 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Center Contact

Solder Only

Crimp Ferrule

M22520 / 5-01 Tool
 M22520 / 5-25 Die Set
 (.429" A hex)

CONSTRUCTION

Materials:

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Outer Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Cable Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Tellurium Copper, ASTM-B301, C14500, H02 Or Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Or Copper, ASTM-B152, Alloy C12200
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Gasket	Silicone Rubber

Finish :

Body, Ferrule	Nickel
Center Contact	Gold

APPLICABLE STANDARDS

MIL-STD 348, MIL-PRF-39012

Notes :

- 1) A 2.0" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1504XX Termination Instruction sheet for strip dimensions & instructions.