
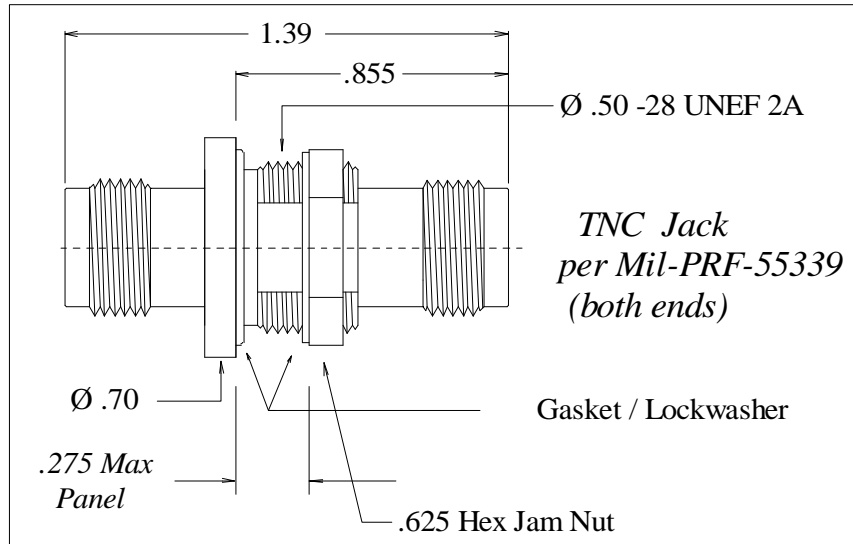


| | | |
|--|---|-------------------------|
| PIC Wire & Cable | Connector Specification | P/N 190011 |
| A Division of the Angelus Corporation Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com PO Box 330 Sussex, WI 53089 | Approved :  | Date : 12/02/05 |
| | Distribution : USER | Rev. 4 (05/06/15) |
| | | Uncontrolled if Printed |

TNC Jack to Jack Bulkhead Adapter, 50 Ohm, Hermetically Sealed
Stainless Steel (High Temp)



PERFORMANCE

| | |
|-------------------------|-------------------|
| Impedance : | 50 Ohms nom |
| Frequency Rating : | 0 - 12 GHz |
| Voltage Rating : | 500 V (rms) |
| Insertion Loss : | 0.14 F (GHz) |
| Insulation Resistance : | 5000 MegOhms min |
| Temperature Rating : | -55° C to +165° C |

CONNECTOR WEIGHT (Each)

.74 ounces (20.98 grams)

RoHS COMPLIANT

Complies to RoHS Standards

APPLICABLE STANDARDS

MIL-PRF-55339, MIL-STD-348

CONSTRUCTION

Materials:

| | |
|------------------|--|
| Connector Body : | Stainless Steel, Alloy UNS S30300 |
| Center Contact : | Beryllium Copper, ASTM-B196, Alloy UNS C17300 |
| Dielectric : | TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1 |

Finish :

| | |
|------------------|------------|
| Body : | Passivated |
| Center Contact : | Gold |

INSTALLATION

Recommended Jam Nut Torque : 35 to 40 in. lbs.

Not to Scale

